


PowerCable


7/8 Male

SiteConnection


Straight / Angle




Male



4Pins



Male




5Pins

Figure	Partnumber	Partnumber
Straight	7/8-M04S	7/8-M05S
Angle	7/8-M04A	7/8-M05A


7/8 Female

SiteConnection


Straight / Angle




Female



4Pins



Female



5Pins



Figure	Partnumber	Partnumber
Straight	7/8-F04S	7/8-F05S
Angle	7/8-F04A	7/8-F05A

Parameters :


	4Pin	5Pin
Rated voltage	600 V AC/DC	600 V AC/DC
Working Current	max. 8A	max. 8A
WorkTempreture	-25...+80°C	-25...+80°C
Cross-Section:	1.5mm ²	1.5mm ²

4.2.2

7/8 Flange Male
Front Mounting

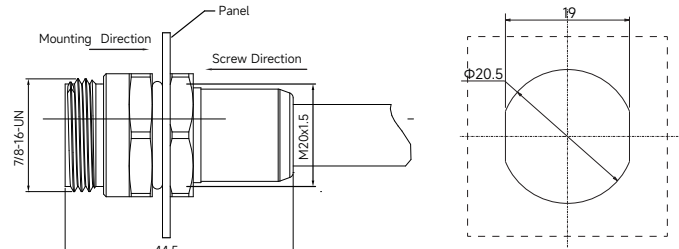


Male




3Pins

Partnumber

FLF-7/8-M03(M20)-HB




Male




4Pins

Partnumber

FLF-7/8-M04(M20)-HB



Male






5Pins

Partnumber


FLF-7/8-M05(M20)-HB

Power
Connection

7/8 Flange Female
-Front Mounting

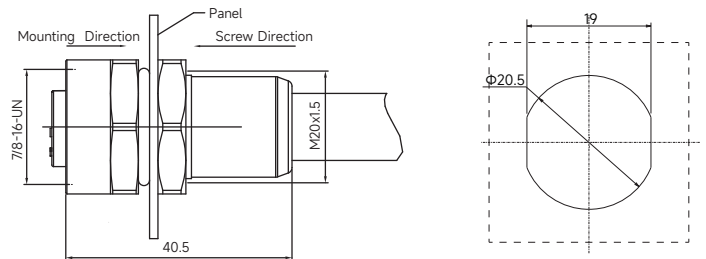


Female




3Pins

Partnumber

FLF-7/8-F03(M20)-HB




Female




4Pins

Partnumber

FLF-7/8-F04(M20)-HB



Female




5Pins

Partnumber


FLF-7/8-F05(M20)-HB

Parameters :	3Pins	4Pins	5Pins
Rated voltage	600 V AC/DC		
Working Current	max. 8A		
WorkTemperture	-25...+80°C		

7/8 T-Connection M12-7/8"

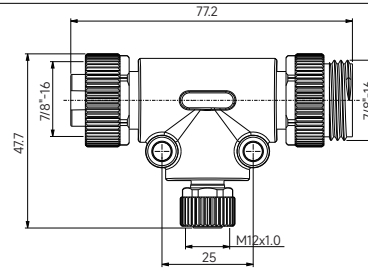


Male 1.Female



2.Female

Male Female Female



5Pins


Partnumber

M12TF05-7/8F05-7/8M05


Technical Parameters :

Rated Voltage:	2500 V AC/DC
Rate Current	max. 4A
Connection	Metal Nut
IP-Protection	IP67- (EN 60529)

7/8 T-Connection 7/8"-7/8"




Male Female



Female

Male Female




3Pins


Partnumber

7/8T-M03/2F03

Male Female



Male Female




4Pins


Partnumber

7/8T-M04/2F04

Male Female



Male Female



5Pins

Partnumber

7/8T-M05/2F05





Technical Parameters :

3Pins	4Pins	5Pins
Rated voltage	600 V AC/DC	
Working Current	max. 13A	max. 10A
WorkTemperture	-25...+80°C	max. 8A
IP-ProtectionLevel	IP67- (EN 60529)	

PowerCable

7/8 JunctionBox

4 Ports

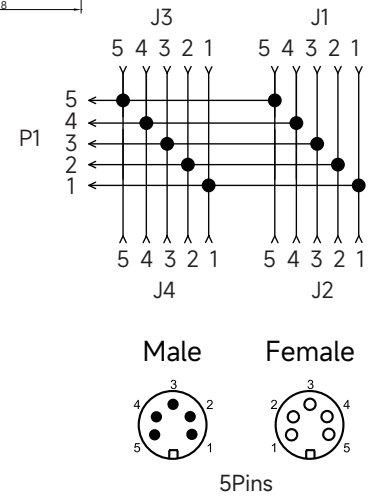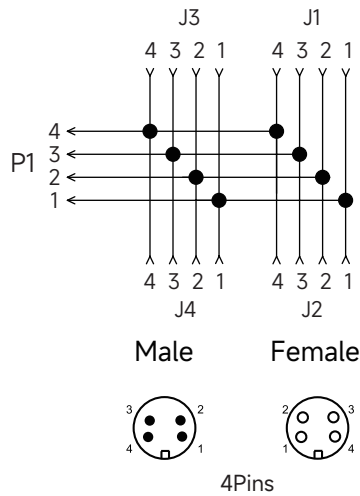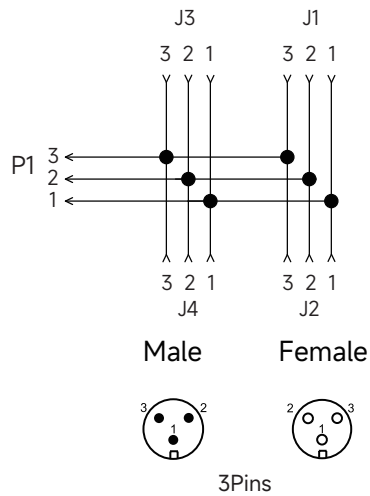

Power
Connection

Partnumber

7/8-4x3P

Partnumber





7/8-4x4P

Partnumber

7/8-4x5P

7/8Junction

Box 8Ports

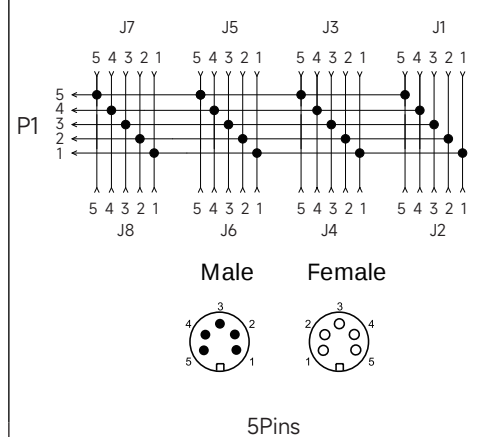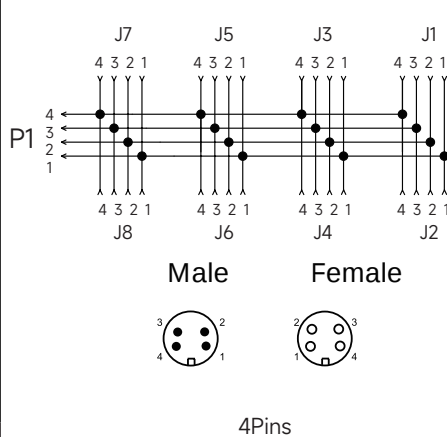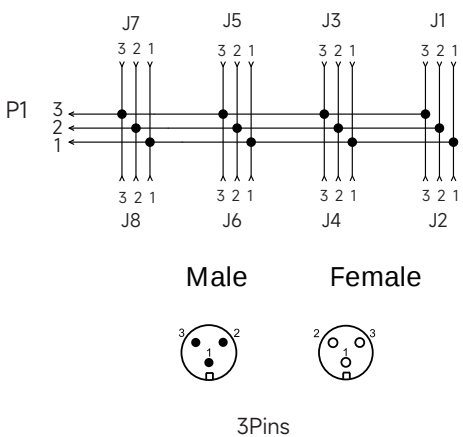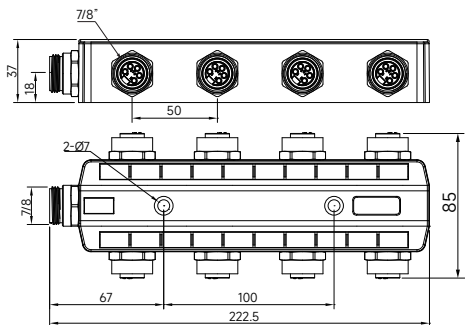

Partnumber

7/8-8x3P

Partnumber

7/8-8x4P

Partnumber

7/8-8x5P

Technical Parameters :

3Pins

4Pins

5Pins

Rated voltage

600 V AC/DC

Working Current

max. 8A



EnvironmentTemperture

-25...+80°C

WorkTemperture

0°C ...+60°C


7/8Pre-Molding Male-Straight




Male




3Pins




Male



4Pins




Male



5Pins

Jacket Material		Partnumber	Partnumber	Partnumber
PUR	Black	7/8-M03S-2.0PUR/BK	7/8-M04S-2.0PUR/BK	7/8-M05S-2.0PUR/BK
Stock PVC	Yellow	7/8-M03S-2.0PVC/YW	7/8-M04S-2.0PVC/YW	7/8-M05S-2.0PVC/YW


7/8Pre-Molding Male-Angle




Male




3Pins




Male



4Pins



Male



5Pins

Jacket Material		Partnumber	Partnumber	Partnumber
PUR	Black	7/8-M03A-2.0PUR/BK	7/8-M04A-2.0PUR/BK	7/8-M05A-2.0PUR/BK
Stock PVC	Yellow	7/8-M03A-2.0PVC/YW	7/8-M04A-2.0PVC/YW	7/8-M05A-2.0PVC/YW

Comment : Cable Length could be customized;

Technical Parameters :	3Pins	4Pins	5Pins
Rated voltage	300 V AC/DC	300 V AC/DC	300 V AC/DC
Cross-Section	3*1.5	4*1.5	5*1.5
WorkTemperture	-25...+80°C	-25...+80°C	-25...+80°C
IP-Protection	IP67	IP67	IP67

4.2.6

PowerCable

7/8Pre-Molding
Female-Straight




Female



Female




Female



Power
Connection

Jacket	Color	Partnumber	Partnumber	Partnumber	
PUR	Black	7/8-F03S-2.0PUR/BK	7/8-F04S-2.0PUR/BK	7/8-F05S-2.0PUR/BK	
PVC	Yellow	7/8-F03S-2.0PVC/YW	7/8-F04S-2.0PVC/YW	7/8-F05S-2.0PVC/YW	Stock

7/8 Female-Angle




Female



Female



Female






Jacket	Color	Partnumber	Partnumber	Partnumber	
PUR	Black	7/8-F03A-2.0PUR/BK	7/8-F04A-2.0PUR/BK	7/8-F05A-2.0PUR/BK	
PVC	Yellow	7/8-F03A-2.0PVC/YW	7/8-F04A-2.0PVC/YW	7/8-F05A-2.0PVC/YW	Stock

Comment : Cable Length could be customized





Technical Parameters :	3Pins	4Pins	5Pins
Rated Voltage:	300 V AC/DC	300 V AC/DC	300 V AC/DC
Wire Gauge	3*1.5	4*1.5	5*1.5
WorkTemperture	-25...+80°C	-25...+80°C	-25...+80°C
IP Protection	IP67	IP67	IP67

Cordset
7/8Male/Straight
7/8Female/Straight

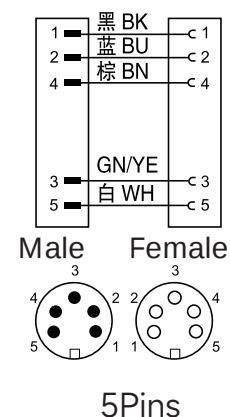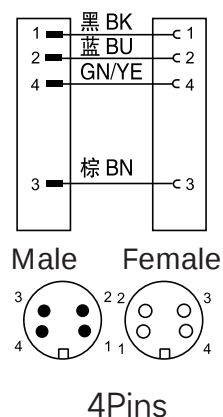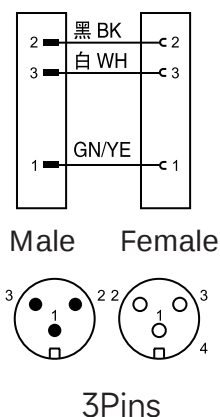

Jacket	Color	Partnumber	Partnumber	Partnumber
PUR	Black	7/8-M03S/F03S-2.0PUR/BK	7/8-M04S/F04S-2.0PUR/BK	7/8-M05S/F05S-2.0PUR/BK
Stock PVC	Yellow	7/8-M03S/F03S-2.0PVC/YW	7/8-M04S/F04S-2.0PVC/YW	7/8-M05S/F05S-2.0PVC/YW

Cordset
7/8Male-Straight
7/8Female/Angle

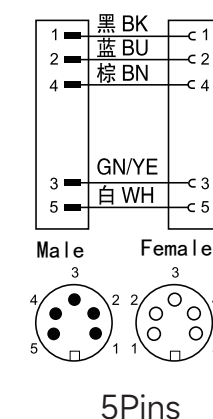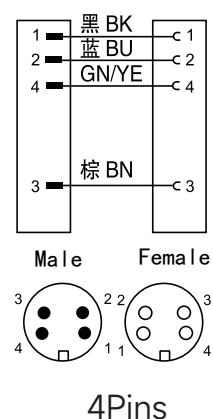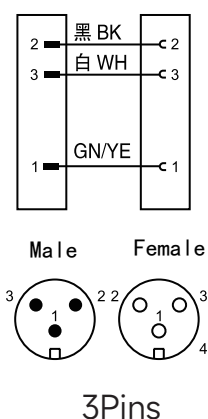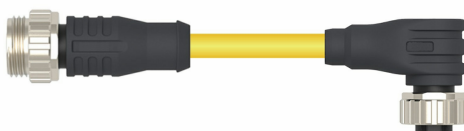


Jacket	Color	Partnumber	Partnumber	Partnumber
PUR	Black	7/8-M03S/F03A-2.0PUR/BK	7/8-M04S/F04A-2.0PUR/BK	7/8-M05S/F05A-2.0PUR/BK
Stock PVC	Yellow	7/8-M03S/F03A-2.0PVC/YW	7/8-M04S/F04A-2.0PVC/YW	7/8-M05S/F05A-2.0PVC/YW

Comment : Cable Length could be customized

Technical Parameters :	3Pins	4Pins	5Pins
Rated Voltage:	300 V AC/DC	300 V AC/DC	300 V AC/DC
Wire Gauge	3*1.5	4*1.5	5*1.5
WorkTemperture	-25...+80°C	-25...+80°C	-25...+80°C
IP Protection	IP67	IP67	IP67

PowerCable

Pre-molding
7/8Male Angle -
Female Straight

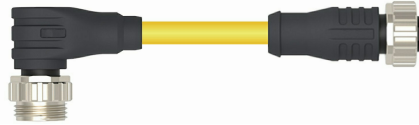

Power
Connection

		Male Female 3Pins	Male Female 4Pins	Male Female 5Pins
Jacket Color	Partnumber	Partnumber	Partnumber	
PUR Black	7/8-M03A/F03S-2.0PUR/BK	7/8-M04A/F04S-2.0PUR/BK	7/8-M05A/F05S-2.0PUR/BK	
PVC Yellow	7/8-M03A/F03S-2.0PVC/YW	7/8-M04A/F04S-2.0PVC/YW	7/8-M05A/F05S-2.0PVC/YW	Stock

7/8Male/Angle
7/8Female/Angle




		Male Female 3Pins	Male Female 4Pins	Male Female 5Pins
Jacket Color	Partnumber	Partnumber	Partnumber	
PUR Black	7/8-M03A/F03A-2.0PUR/BK	7/8-M04A/F04A-2.0PUR/BK	7/8-M05A/F05A-2.0PUR/BK	
PVC Yellow	7/8-M03A/F03A-2.0PVC/YW	7/8-M04A/F04A-2.0PVC/YW	7/8-M05A/F05A-2.0PVC/YW	Stock

Comment : Cable Length could be customized


Technical Parameters :	3Pins	4Pins	5Pins
Rated Voltage:	300 V AC/DC	300 V AC/DC	300 V AC/DC
Wire Gauge	3*1.5	4*1.5	5*1.5
WorkTemperture	-25...+80°C	-25...+80°C	-25...+80°C
IP Protection	IP67	IP67	IP67



7/8 Connector、Male 、5Pins、Straight



Male




Partnumber


7/8-M05S



7/8 Connector、Male 、5Pins、Angle



Male




Partnumber


7/8-M05A



7/8 Connector、Female、5Pins、Straight



Female




Partnumber


7/8-F05S



7/8 Connector、Female、5Pins、Angle



Female







Partnumber

7/8-F05A

Parameter :



Rated Voltage:	300 V AC/DC
WorkTempreture	-25...+80°C
Cross-Section:	5x 1.5mm2
IP Protection	IP65

7/8" terminal resistor

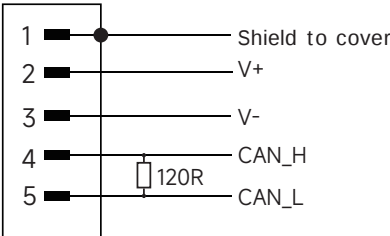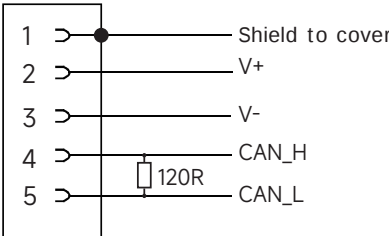	
Male	Female
	
Male 5Pins	Female 5Pins
PartNumber	PartNumber
7/8-MS-RES-DN	7/8-FS-RES-DN
	

terminal
resistor

M12 BusTerminal

	
	
Male	Female
	
Male 5Pins B-Code	Female 5Pins B-Code
Partnumber	Partnumber
M12B-M05S-RES-CAN	M12B-F05S-RES-CAN
