

FADEYA



M12 Connector Cordset


fadeya (shanghai) co . , Ltd

FADEYA


Automation Package Solution



M12 Male Straight

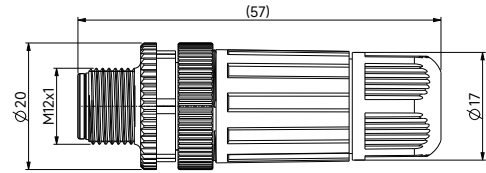


Code	4Pins		5Pins		8Pins	
	Male	PartNumber	Male	PartNumber	Male	PartNumber
A		M12A-M04S		M12A-M05S		M12A-M08S
B				M12B-M05S		
D		M12D-M04S				

SiteConnection
M12Male-Angle





Code	4Pins		5Pins		8Pins	
	Male	Partnumber	Male	Partnumber	Male	Partnumber
A		M12A-M04A		M12A-M05A		M12A-M08A
B				M12B-M05A		
D		M12D-M04A				

Technical Parameter:	4Pins	5Pins	8Pins
Rated voltage	250v	125V	60V
End-Tighten	Metal nut locking		
Cable Connection	By Screw		
Cross-Section	0.75mm ²	0.75mm ²	0.5mm ²
CableEntry diameter	PG7:4-6mm PG9:6-8mm		

M12Female-Straight

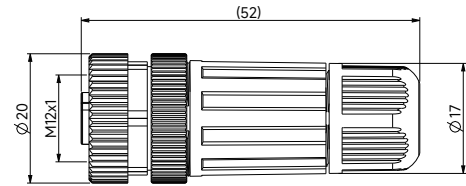

Site
Connection







Code	Partnumber	Partnumber	Partnumber
A	M12A-F04S	M12A-F05S	M12A-F08S
B		M12B-F05S	
D	M12D-F04S		

9

9

SiteConnection on
M12Female/Angle



Code	Partnumber	Partnumber	Partnumber
A	M12A-F04A	M12A-F05A	M12A-F08A
B		M12B-F05A	
D	M12D-F04A		



9

9


Technical Parameter:

	4Pins	5Pins	8Pins
Rated voltage	250v	125V	60V
End-Tighten	Metal Nut		
Cable Connection	By Screw		
Cross-Section	0.75mm ²	0.75mm ²	0.5mm ²
CableEntryDiameter	PG7:4-6mm PG9:6-8mm		


M12 Shield Connector

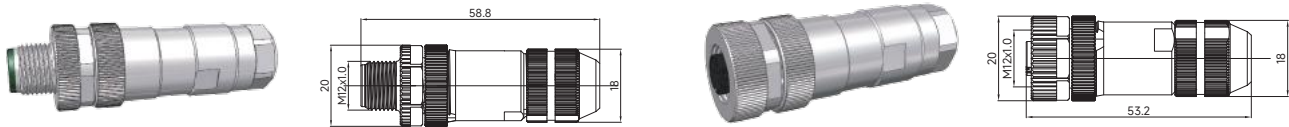


Male, Straight




Male, Straight




Male, Straight



Female, Straight





Female, Straight




Female, Straight


Code	PartNumber	PartNumber	PartNumber	PartNumber	PartNumber	PartNumber
A	M12-M04S-SH	M12-M05S-SH	M12-M08S-PG9-SH	M12-F04S-SH	M12-F05S-SH	M12-F08S-PG9-SH
B	M12B-M04S-SH	M12B-M05S-SH		M12B-F04S-SH	M12B-F05S-SH	
D	M12D-M04S-SH	M12D-M05S-SH		M12D-F04S-SH	M12D-F05S-SH	

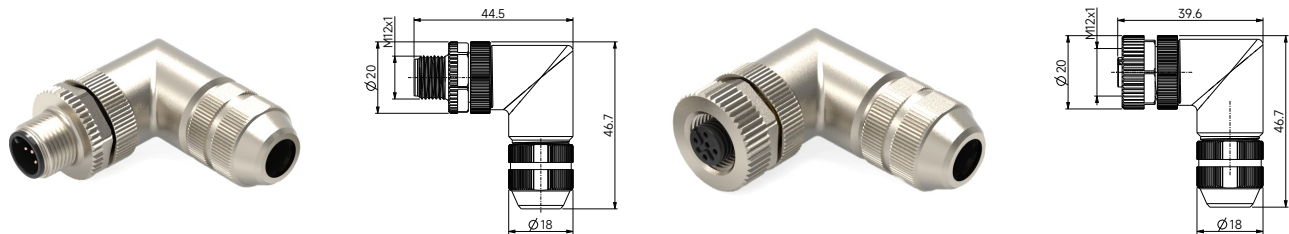


Male, Angle




Male, Angle




Male, Angle



Female, Angle



Female, Angle




Female, Angle

Code	PartNumber	PartNumber	PartNumber	PartNumber	PartNumber	PartNumber
A	M12-M04A-SH	M12-M05A-SH	M12-M05A-SH	M12-F04A-SH	M12-F05A-SH	M12-F08A-SH
B	M12B-M04A-SH	M12B-M05A-SH		M12B-F04A-SH	M12B-F05A-SH	
D	M12D-M04A-SH	M12D-M05A-SH		M12D-F04A-SH	M12D-F05A-SH	

Technical Parameter:


	4Pins	5Pins	8Pins
Rated voltage	250V	125V	60V
End-Tighten	Metal Nut	Metal Nut	Metal Nut
Cable Connection	By Screw	By Screw	By Screw
Cross-Section	0.75mm ²	0.75mm ²	0.5mm ²
IP Protection Level	IP67	IP67	IP67

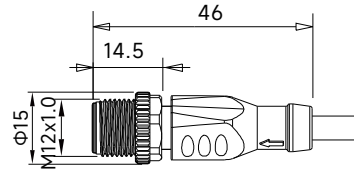M12 Male-
Straight

Pre-mold

3Pins


Male



Partnumber

4Pins

Male




Partnumber

Jacket		0.34mm ²		
Stock	PVC	GY	M12A-M03S-2.0PVC/GY	M12A-M04S-2.0PVC/GY
	PVC	BK	M12A-M03S-2.0PVC/BK	M12A-M04S-2.0PVC/BK
	PUR	GY	M12A-M03S-2.0PUR/GY	M12A-M04S-2.0PUR/GY
Stock	PUR	BK	M12A-M03S-2.0PUR/BK	M12A-M04S-2.0PUR/BK
	High-Flexible	GY	M12A-M03S-2.0HF/GY	M12A-M04S-2.0HF/GY
Stock	H-F	BK	M12A-M03S-2.0HF/BK	M12A-M04S-2.0HF/BK
Stock	Anti-Welding	OG	M12A-M03S-2.0AW/OG	M12A-M04S-2.0AW/OG

M12 Male-
Straight

5Pins


Male



Partnumber

8Pins

Male



Partnumber

Jacket		0.25mm ²		
Stock	PVC	GY	M12A-M05S-2.0PVC/GY	M12A-M08S-2.0PVC/G
	PVC	BK	M12A-M05S-2.0PVC/BK	M12A-M08S-2.0PVC/BK
	PUR	GY	M12A-M05S-2.0PUR/GY	M12A-M08S-2.0PUR/GY
Stock	PUR	BK	M12A-M05S-2.0PUR/BK	M12A-M08S-2.0PUR/BK
	High-Flexible	GY	M12A-M05S-2.0HF/GY	M12A-M08S-2.0HF/GY
Stock	H-F	BK	M12A-M05S-2.0HF/BK	M12A-M08S-2.0HF/BK
Stock	Anti-Welding	OG	M12A-M05S-2.0OG/BK	M12A-M08S-2.0OG/BK

Comment:Length Could be Customized , standard length is 2 meters

If need B , D code , please change M12A to M12B or M12 D ;

Technical Parameter:



	3Pins	4Pins	5Pins	8Pins
Rated voltage	250v	250V	125V	60V
End-Tighten	Metal Nut	Metal Nut	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding	Premolding	Premolding
Cross-Section	0.34mm(AWG24)	0.34mm(AWG24)	0.25mm(AWG24)	0.25mm(AWG24)
IP Protection Level	IP67	IP67	IP67	IP67

SingleEnd Premold Cordset

M12Male-
Angle


3Pins

Male



4Pins

Male




Cordset

Jacket	0.34mm2	Partnumber	Partnumber	
PVC	GY	M12A-M03A-2.0PVC/GY	M12A-M04A-2.0PVC/GY	Stock
PVC	BK	M12A-M03A-2.0PVC/BK	M12A-M04A-2.0PVC/BK	
PUR	GY	M12A-M03A-2.0PUR/GY	M12A-M04A-2.0PUR/GY	
PUR	BK	M12A-M03A-2.0PUR/BK	M12A-M04A-2.0PUR/BK	Stock
High-Flexible	GY	M12A-M03A-2.0HF/GY	M12A-M04A-2.0HF/GY	
High-Flexible	BK	M12A-M03A-2.0HF/BK	M12A-M04A-2.0HF/BK	Stock
Anti-Welding	OG	M12A-M03A-2.0PVC/OG	M12A-M04A-2.0PVC/OG	Stock





5Pins

Male



8Pins

Male




Jacket	0.25mm2	Partnumber	Partnumber	
PVC	GY	M12A-M05A-2.0PVC/GY	M12A-M08A-2.0PVC/GY	Stock
PVC	BK	M12A-M05A-2.0PVC/BK	M12A-M08A-2.0PVC/BK	
PUR	GY	M12A-M05A-2.0PUR/GY	M12A-M08A-2.0PUR/GY	
PUR	BK	M12A-M05A-2.0PUR/BK	M12A-M08A-2.0PUR/BK	Stock
High-Flexible	GY	M12A-M05A-2.0HF/GY	M12A-M08A-2.0HF/GY	
High-Flexible	BK	M12A-M05A-2.0HF/BK	M12A-M08A-2.0HF/BK	Stock
Anti-Welding	OG	M12A-M05A-2.0PVC/OG	M12A-M08A-2.0PVC/OG	Stock

Comment:Length Could be Customized , standard length is 2 meters

If need B , D code , please change M12A to M12B or M12 D ;


Technical Parameter:

	3Pins	4Pins	5Pins	8Pins
Rated voltage	250v	250V	125V	60V
End-Tighten	Metal Nut	Metal Nut	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding	Premolding	Premolding
Cross-Section	0.34mm(AWG24)	0.34mm(AWG24)	0.25mm(AWG24)	0.25mm(AWG24)
IP Protection Level	IP67	IP67	IP67	IP67

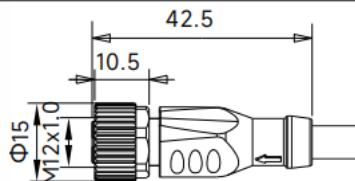M12Female-
Straight


3Pins

Female



4Pins


Female



Partnumber



Partnumber

Jacket	0.34mm2		
Stock PVC	GY	M12A-F03S-2.0PVC/GY	M12A-F04S-2.0PVC/GY
PVC	BK	M12A-F03S-2.0PVC/BK	M12A-F04S-2.0PVC/BK
PUR	GY	M12A-F03S-2.0PUR/GY	M12A-F04S-2.0PUR/GY
Stock PUR	BK	M12A-F03S-2.0PUR/BK	M12A-F04S-2.0PUR/BK
High-Flexible	GY	M12A-F03S-2.0HF/GY	M12A-F04S-2.0HF/GY
Stock H-F	BK	M12A-F03S-2.0HF/BK	M12A-F04S-2.0HF/BK
Stock Anti-Welding	OG	M12A-F03S-2.0AW/OG	M12A-F04S-2.0AW/OG

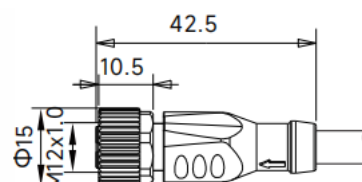



5Pins

Female



8Pins

Female



Partnumber

Partnumber

Jacket	0.25mm2		
Stock PVC	GY	M12A-F05S-2.0PVC/GY	M12A-F08S-2.0PVC/GY
PVC	BK	M12A-F05S-2.0PVC/BK	M12A-F08S-2.0PVC/BK
PUR	GY	M12A-F05S-2.0PUR/GY	M12A-F08S-2.0PUR/GY
Stock PUR	BK	M12A-F05S-2.0PUR/BK	M12A-F08S-2.0PUR/BK
High-Flexible	GY	M12A-F05S-2.0HF/GY	M12A-F08S-2.0HF/GY
Stock H-F	BK	M12A-F05S-2.0HF/BK	M12A-F08S-2.0HF/BK
Stock Anti-Welding	OG	M12A-F05S-2.0PVC/OG	M12A-F08S-2.0PVC/OG


Comment:Length Could be Customized , standard length is 2 meters

If need B , D code , please change M12A to M12B or M12 D ;

Technical Parameter:


	3Pins	4Pins	5Pins	8Pins
Rated voltage	250v	250V	125V	60V
End-Tighten	Metal Nut	Metal Nut	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding	Premolding	Premolding
Cross-Section	0.34mm(AWG24)	0.34mm(AWG24)	0.25mm(AWG24)	0.25mm(AWG24)
IP Protection Level	IP67	IP67	IP67	IP67

M12 Female Angle




3Pins

Female





4Pins

Female





Jacket	0.34mm ²	Partnumber	Partnumber	
PVC	GY	M12A-F03A-2.0PVC/GY	M12A-F04A-2.0PVC/GY	Stock
PVC	BK	M12A-F03A-2.0PVC/BK	M12A-F04A-2.0PVC/BK	
PUR	GY	M12A-F03A-2.0PUR/GY	M12A-F04A-2.0PUR/GY	
PUR	BK	M12A-F03A-2.0PUR/BK	M12A-F04A-2.0PUR/BK	Stock
High-Flexible	GY	M12A-F03A-2.0HF/GY	M12A-F04A-2.0HF/GY	
High-Flexible	BK	M12A-F03A-2.0HF/BK	M12A-F04A-2.0HF/BK	Stock
Anti-Welding	OG	M12A-F03A-2.0PVC/OG	M12A-F04A-2.0PVC/OG	Stock

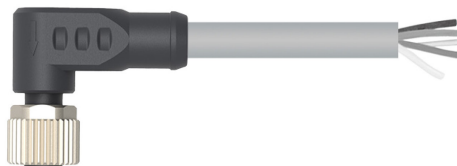



5Pins

Female



8Pins

Female



Jacket	0.25mm ²	Partnumber	Partnumber	
PVC	GY	M12A-F05A-2.0PVC/GY	M12A-F08A-2.0PVC/GY	Stock
PVC	BK	M12A-F05A-2.0PVC/BK	M12A-F08A-2.0PVC/BK	
PUR	GY	M12A-F05A-2.0PUR/GY	M12A-F08A-2.0PUR/GY	
PUR	BK	M12A-F05A-2.0PUR/BK	M12A-F08A-2.0PUR/BK	Stock
High-Flexible	GY	M12A-F05A-2.0HF/GY	M12A-F08A-2.0HF/GY	
High-Flexible	BK	M12A-F05A-2.0HF/BK	M12A-F08A-2.0HF/BK	Stock
Anti-Welding	OG	M12A-F05A-2.0PVC/OG	M12A-F08A-2.0PVC/OG	Stock

Comment:Length Could be Customized , standard length is 2 meters

If need B , D code , Please change M12A to M12B or M12 D ;

Technical Parameter:


	3Pins	4Pins	5Pins	8Pins
Rated voltage	250v	250V	125V	60V
End-Tighten	Metal Nut	Metal Nut	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding	Premolding	Premolding
Cross-Section	0.34mm(AWG24)	0.34mm(AWG24)	0.25mm(AWG24)	0.25mm(AWG24)
IP Protection Level	IP67	IP67	IP67	IP67

M12 Male



12Pins

Male




1	BN
2	BU
3	WH
4	GN
5	PK
6	YE
7	BK
8	GY
9	RD
10	VT
11	GY / PK (BN / GN)
12	RD / BU (WH / GN)

Partnumber

12Pins

Male



1	BN
2	BU
3	WH
4	GN
5	PK
6	YE
7	BK
8	GY
9	RD
10	VT
11	GY / PK (BN / GN)
12	RD / BU (WH / GN)

Partnumber

Jacket 0.34mm²


Stock	PVC	GY	M12A-M12S-2.0PVC/GY	M12A-M12A-2.0PVC/GY
	PUR	GY	M12A-M12S-2.0PUR/GY	M12A-M12A-2.0PUR/GY
Stock	PUR	BK	M12A-M12S-2.0PUR/BK	M12A-M12A-2.0PUR/BK

M12 Female



12Pins

Female




1	BN
2	BU
3	WH
4	GN
5	PK
6	YE
7	BK
8	GY
9	RD
10	VT
11	GY / PK (BN / GN)
12	RD / BU (WH / GN)

Partnumber

12Pins

Female



1	BN
2	BU
3	WH
4	GN
5	PK
6	YE
7	BK
8	GY
9	RD
10	VT
11	GY / PK (BN / GN)
12	RD / BU (WH / GN)

Partnumber

Jacket 0.34mm²

Stock	PVC	GY	M12A-F12S-2.0PVC/GY	M12A-F12A-2.0PVC/GY
	PUR	GY	M12A-F12S-2.0PUR/GY	M12A-F12A-2.0PUR/GY
Stock	PUR	BK	M12A-F12S-2.0PUR/BK	M12A-F12A-2.0PUR/BK


Technical Parameter:

CommentLength Could be Customized, standard length is 2 meters
If need B, D code, please change M12A to M12B or M12D;

12Pins


Rated voltage	30 V
End-Tighten	Metal Nut
Cable Connection	Premolding
Cross-Section	0.25/0.14mm
IP Protection Level	IP67

LED
M12Female-
Straight

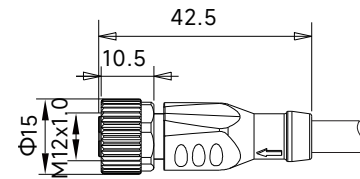


3Pins (PNP)

Female




4Pins (PNP)

Female




Jacket	0.34mm ²	Partnumber	Partnumber	
PVC	GY	M12A-F03SL2-2.0PVC/GY	M12A-F04SL2-2.0PVC/GY	Stock
PVC	BK	M12A-F03SL2-2.0PVC/BK	M12A-F04SL2-2.0PVC/BK	
PUR	GY	M12A-F03SL2-2.0PUR/GY	M12A-F04SL2-2.0PUR/GY	
PUR	BK	M12A-F03SL2-2.0PUR/BK	M12A-F04SL2-2.0PUR/BK	Stock
High-Flexible	GY	M12A-F03SL2-2.0PVC/GY	M12A-F04SL2-2.0PVC/GY	
High-Flexible	BK	M12A-F03SL2-2.0PVC/BK	M12A-F04SL2-2.0PVC/BK	
Anti-Welding	OG	M12A-F03SL2-2.0PVC/OG	M12A-F04SL2-2.0PVC/OG	Stock

M12 Female
Angle




3Pins (PNP)

Female



4Pins (PNP)

Female



Jacket	0.34mm ²	Partnumber	Partnumber	
PVC	GY	M12A-F03AL2-2.0PVC/GY	M12A-F04AL2-2.0PVC/GY	Stock
PVC	BK	M12A-F03AL2-2.0PVC/BK	M12A-F04AL2-2.0PVC/BK	
PUR	GY	M12A-F03AL2-2.0PUR/GY	M12A-F04AL2-2.0PUR/GY	
PUR	BK	M12A-F03AL2-2.0PUR/BK	M12A-F04AL2-2.0PUR/BK	Stock
High-Flexible	GY	M12A-F03AL2-2.0HF/GY	M12A-F04AL2-2.0HF/GY	
High-Flexible	BK	M12A-F03AL2-2.0HF/BK	M12A-F04AL2-2.0HF/BK	Stock
Anti-Welding	OG	M12A-F03AL2-2.0AW/GY	M12A-F04AL2-2.0AW/GY	Stock


Comment:Length Could be Customized , standard length is 2 meters

If need B , D code , please change M12A to M12B or M12 D ;

Technical Parameter:


	3Pins	4Pins
Rated voltage	250v	250V
End-Tighten	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding
Cross-Section	0.34mm(AWG24)	0.34mm(AWG24)
IP Protection Level	IP67	IP67

M12Female- AngleLED*3




4Pins (PNP)

Female

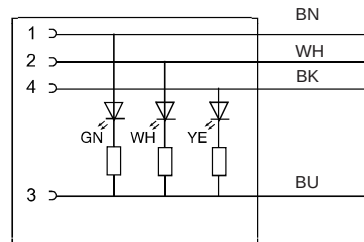

5Pins (PNP)

Female

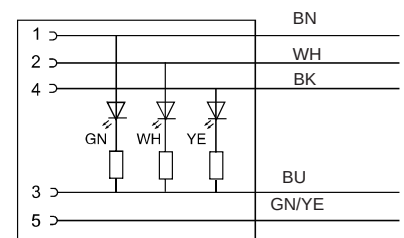

Jacket		0.34mm ²	Partnumber	Partnumber
Stock	PVC	GY	M12A-F04AL3-2.0PVC/GY	M12A-F05AL3-2.0PVC/GY
	PVC	BK	M12A-F04AL3-2.0PVC/BK	M12A-F05AL3-2.0PVC/BK
	PUR	GY	M12A-F04AL3-2.0PUR/GY	M12A-F05AL3-2.0PUR/GY
Stock	PUR	BK	M12A-F04AL3-2.0PUR/BK	M12A-F05AL3-2.0PUR/BK
	High-Flexible	GY	M12A-F04AL3-2.0HF/GY	M12A-F05AL3-2.0HF/GY
Stock	H-F	BK	M12A-F04AL3-2.0HF/BK	M12A-F05AL3-2.0HF/BK
	Stock	Anti-Welding	OG	M12A-F04AL3-2.0AW/OG
				M12A-F05AL3-2.0AW/OG


Comment:Length Could be Customized , standard length is 2 meters

If need B , D code , please change M12A to M12B or M12 D ;

Technical Parameter:

	4Pins	5Pins
Rated voltage	250V	125V
End-Tighten	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding
Cross-Section	0.34mm(AWG24)	0.25mm(AWG24)
IP Protection Level	IP67	IP67

Double end
M12Male、Straight
M12Female、Straight

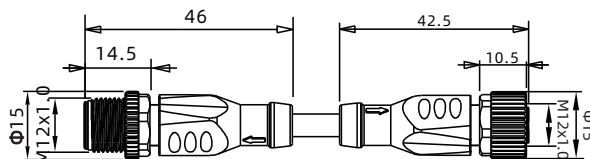

Jacket		0.34mm ²	3Pins	4Pins	Stock
Jacket	PVC	GY			
	PVC	BK			
	PUR	GY			
	PUR	BK			
High-Flexible	GY				
High-Flexible	BK				
Anti-Welding	OG				



Jacket		0.25mm ²	5Pins	8Pins	Stock
Jacket	PVC	GY			
	PVC	BK			
	PUR	GY			
	PUR	BK			
High-Flexible	GY				
High-Flexible	BK				
Anti-Welding	OG				


Comment:Length Could be Customized , standard length is 2 meters

If need B , D code , please change M12A to M12B or M12 D ;

Technical Parameter:



	3Pins	4Pins	5Pins	8Pins
Rated voltage	250V	250V	125V	60V
End-Tighten	Metal Nut	Metal Nut	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding	Premolding	Premolding
Cross-Section	0.34mm(AWG24)	0.34mm(AWG24)	0.25mm(AWG24)	0.25mm(AWG24)
IP Protection Level	IP67	IP67	IP67	IP67

M12Male、
Straight/
M12Female
Angle

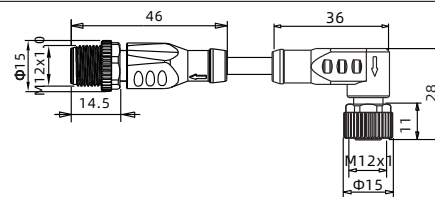



3Pins

Male Female



4Pins

Male Female



Partnumber



Partnumber

Jacket	0.34mm ²		
Stock	PVC	GY	M12A-M03S/F03A-2.0PVC/GY
	PVC	BK	M12A-M03S/F03A-2.0PVC/BK
	PUR	GY	M12A-M03S/F03A-2.0PUR/GY
Stock	PUR	BK	M12A-M03S/F03A-2.0PUR/BK
High-Flexible	GY		M12A-M03S/F03A-2.0HF/GY
Stock	H-F	BK	M12A-M03S/F03A-2.0HF/BK
Stock	Anti-Welding	OG	M12A-M03S/F03A-2.0AW/OG





5Pins

Male Female



8Pins

Male Female



Partnumber

Partnumber

Jacket			
Stock	PVC	GY	M12A-M05S/F05A-2.0PVC/GY
	PVC	BK	M12A-M05S/F05A-2.0PVC/BK
	PUR	GY	M12A-M05S/F05A-2.0PUR/GY
Stock	PUR	BK	M12A-M05S/F05A-2.0PUR/BK
High-Flexible	GY		M12A-M05S/F05A-2.0HF/GY
Stock	H-F	BK	M12A-M05S/F05A-2.0HF/BK
Stock	Anti-Welding	OG	M12A-M05S/F05A-2.0AW/OG

Comment:Length Could be Customized , standard length is 2 meters

If need B , D code , please change M12A to M12B or M12 D ;



Technical Parameter:

	3Pins	4Pins	5Pins	8Pins
Rated voltage	250v	250V	125V	60V
End-Tighten	Metal Nut	Metal Nut	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding	Premolding	Premolding
Cross-Section	0.34mm(AWG24)	0.34mm(AWG24)	0.25mm(AWG24)	0.25mm(AWG24)
IP Protection Level	IP67	IP67	IP67	IP67


DoubleEnd
M12Male-Angle
M12Female-
Straight



3Pins

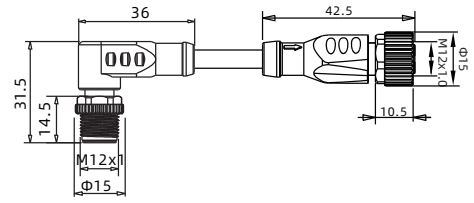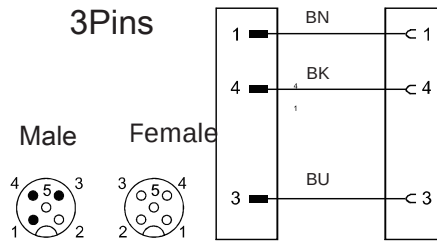



4Pins

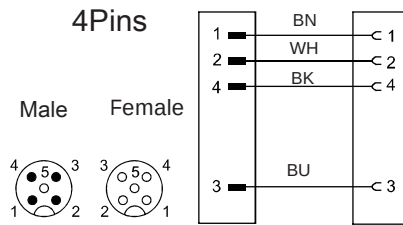


Jacket	0.34mm2	Partnumber	Partnumber	
PVC	GY	M12A-M03A/F03S-2.0PVC/GY	M12A-M04A/F04S-2.0PVC/GY	Stock
PVC	BK	M12A-M03A/F03S-2.0PVC/BK	M12A-M04A/F04S-2.0PVC/BK	
PUR	GY	M12A-M03A/F03S-2.0PUR/GY	M12A-M04A/F04S-2.0PUR/GY	
PUR	BK	M12A-M03A/F03S-2.0PUR/BK	M12A-M04A/F04S-2.0PUR/BK	Stock
High-Flexible	GY	M12A-M03A/F03S-2.0HF/GY	M12A-M04A/F04S-2.0HF/GY	
High-Flexible	BK	M12A-M03A/F03S-2.0HF/BK	M12A-M04A/F04S-2.0HF/BK	Stock
Anti-Welding	OG	M12A-M03A/F03S-2.0AW/OG	M12A-M04A/F04S-2.0AW/OG	Stock



5Pins

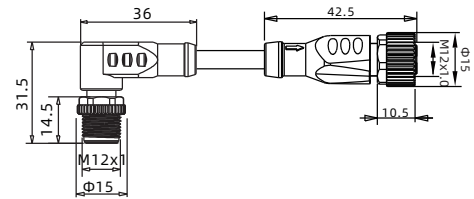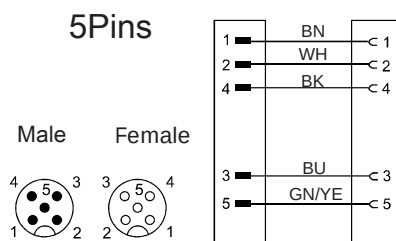

8Pins

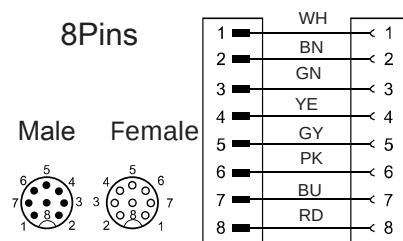

Jacket	0.25mm2	Partnumber	Partnumber	
PVC	GY	M12A-M05A/F05S-2.0PVC/GY	M12A-M08A/F08S-2.0PVC/GY	Stock
PVC	BK	M12A-M05A/F05S-2.0PVC/BK	M12A-M08A/F08S-2.0PVC/BK	
PUR	GY	M12A-M05A/F05S-2.0PUR/GY	M12A-M08A/F08S-2.0PUR/GY	
PUR	BK	M12A-M05A/F05S-2.0PUR/BK	M12A-M08A/F08S-2.0PUR/BK	Stock
High-Flexible	GY	M12A-M05A/F05S-2.0HF/GY	M12A-M08A/F08S-2.0HF/GY	
High-Flexible	BK	M12A-M05A/F05S-2.0HF/BK	M12A-M08A/F08S-2.0HF/BK	Stock
Anti-Welding	OG	M12A-M05A/F05S-2.0AW/OG	M12A-M08A/F08S-2.0AW/OG	Stock

Comment:Length Could be Customized , standard length is 2 meters

If need B , D code , please change M12A to M12B or M12 D ;

Technical Parameter:


	3Pins	4Pins	5Pins	8Pins
Rated voltage	250v	250V	125V	60V
End-Tighten	Metal Nut	Metal Nut	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding	Premolding	Premolding
Cross-Section	0.34mm(AWG24)	0.34mm(AWG24)	0.25mm(AWG24)	0.25mm(AWG24)
IP Protection Level	IP67	IP67	IP67	IP67

DoubleEnd
M12Male-Angle
M12Female-Angle




3Pins

Male Female




Partnumber

Jacket	0.34mm2	Partnumber
Stock PVC	GY	M12A-M03A/F03A-2.0PVC/GY
PVC	BK	M12A-M03A/F03A-2.0PVC/BK
PUR	GY	M12A-M03A/F03A-2.0PUR/GY
Stock PUR	BK	M12A-M03A/F03A-2.0PUR/BK
High-Flexible	GY	M12A-M03A/F03A-2.0HF/GY
Stock H-F	BK	M12A-M03A/F03A-2.0HF/BK
Stock Anti-Welding	OG	M12A-M03A/F03A-2.0AW/OG

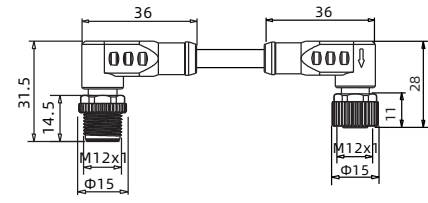

4Pins

Male Female




Partnumber

Jacket	0.34mm2	Partnumber
Stock PVC	GY	M12A-M04A/F04A-2.0PVC/GY
PVC	BK	M12A-M04A/F04A-2.0PVC/BK
PUR	GY	M12A-M04A/F04A-2.0PUR/GY
Stock PUR	BK	M12A-M04A/F04A-2.0PUR/BK
High-Flexible	GY	M12A-M04A/F04A-2.0HF/GY
Stock H-F	BK	M12A-M04A/F04A-2.0HF/BK
Stock Anti-Welding	OG	M12A-M04A/F04A-2.0AW/OG




5Pins

Male Female




Partnumber

Jacket	0.25mm2	Partnumber
Stock PVC	GY	M12A-M05A/F05A-2.0PVC/GY
PVC	BK	M12A-M05A/F05A-2.0PVC/BK
PUR	GY	M12A-M05A/F05A-2.0PUR/GY
Stock PUR	BK	M12A-M05A/F05A-2.0PUR/BK
High-Flexible	GY	M12A-M05A/F05A-2.0PVC/GY
Stock H-F	BK	M12A-M05A/F05A-2.0HF/BK
Stock Anti-Welding	OG	M12A-M05A/F05A-2.0AW/GY

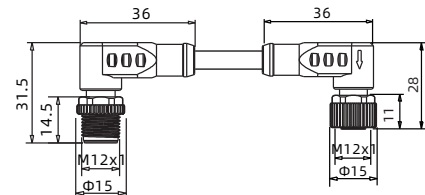

8Pins

Male Female



Partnumber

Jacket	0.25mm2	Partnumber
Stock PVC	GY	M12A-M08A/F08A-2.0PVC/GY
PVC	BK	M12A-M08A/F08A-2.0PVC/BK
PUR	GY	M12A-M08A/F08A-2.0PUR/GY
Stock PUR	BK	M12A-M08A/F08A-2.0PUR/BK
High-Flexible	GY	M12A-M08A/F08A-2.0PVC/GY
Stock H-F	BK	M12A-M08A/F08A-2.0HF/BK
Stock Anti-Welding	OG	M12A-M08A/F08A-2.0AW/GY


Comment:Length Could be Customized , standard length is 2 meters

If need B , D code , please change M12A to M12B or M12 D ;


Technical Parameter:

	3Pins	4Pins	5Pins	8Pins
Rated voltage	250v	250V	125V	60V
End-Tighten	Metal Nut	Metal Nut	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding	Premolding	Premolding
Cross-Section	0.34mm(AWG24)	0.34mm(AWG24)	0.25mm(AWG24)	0.25mm(AWG24)
IP Protection Level	IP67	IP67	IP67	IP67


DoubleEnd
M12 Male、
Straight
M8Female、
Straight

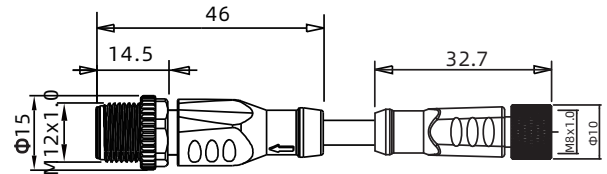

3Pins

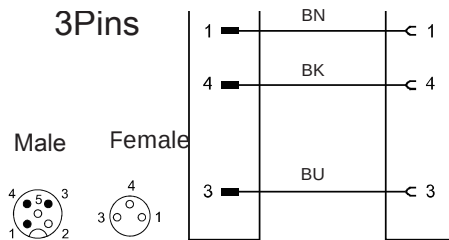


4Pins

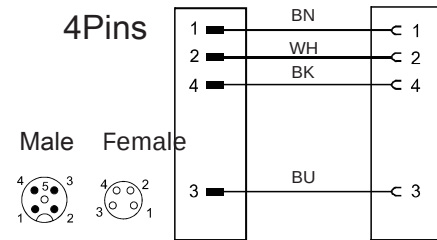


Jacket 0.25mm²

PVC	GY	M12A-M03S/M8-F03S-2.0PVC/GY	M12A-M04S/M8-F04S-2.0PVC/GY	Stock
PVC	BK	M12A-M03S/M8-F03S-2.0PVC/BK	M12A-M04S/M8-F04S-2.0PVC/BK	
PUR	GY	M12A-M03S/M8-F03S-2.0PUR/GY	M12A-M04S/M8-F04S-2.0PUR/GY	
PUR	BK	M12A-M03A/M8-F03S-2.0PUR/BK	M12A-M04S/M8-F04S-2.0PUR/BK	Stock
High-Flexible	GY	M12A-M03S/M8-F03S-2.0HF/GY	M12A-M04S/M8-F04S-2.0HF/GY	
High-Flexible	BK	M12A-M03S/M8-F03S-2.0HF/BK	M12A-M04S/M8-F04S-2.0HF/BK	Stock
Anti-Welding	OG	M12A-M03S/M8-F03S-2.0AW/GY	M12A-M04S/M8-F04S-2.0AW/GY	Stock


DoubleEnd
M12 Male、
Straight
M8 Female
、 Angle

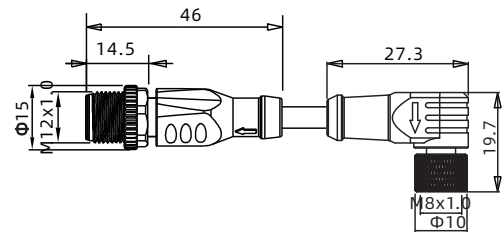

3Pins

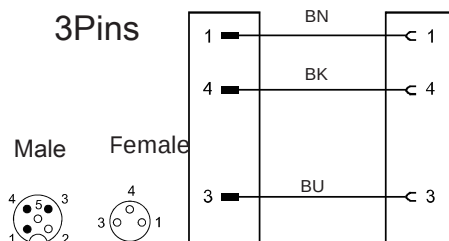

4Pins

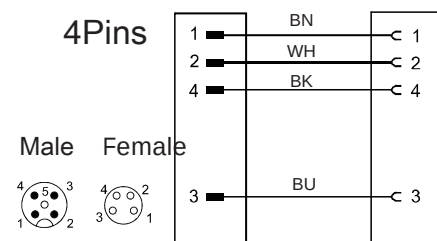

Jacket 0.25mm²

		PartNumber	PartNumber	
PVC	GY	M12A-M03S/M8-F03A-2.0PVC/GY	M12A-M04S/M8-F04A-2.0PVC/GY	Stock
PVC	BK	M12A-M03S/M8-F03A-2.0PVC/BK	M12A-M04S/M8-F04A-2.0PVC/BK	
PUR	GY	M12A-M03S/M8-F03A-2.0PUR/GY	M12A-M04S/M8-F04A-2.0PUR/GY	
PUR	BK	M12A-M03S/M8-F03A-2.0PUR/BK	M12A-M04S/M8-F04A-2.0PUR/BK	Stock
High-Flexible	GY	M12A-M03S/M8-F03A-2.0HF/GY	M12A-M04S/M8-F04A-2.0HFGY	
High-Flexible	BK	M12A-M03S/M8-F03A-2.0HF/BK	M12A-M04S/M8-F04A-2.0HF/BK	Stock
Anti-Welding	OG	M12A-M03S/M8-F03A-2.0AW/OG	M12A-M04S/M8-F04A-2.0AW/OG	Stock

Comment:Length Could be Customized , standard length is 2 meters

If need B , D code , please change M12A to M12B or M12 D ;

Technical Parameter:

	3Pins	4Pins
Rated voltage	250v	250V
End-Tighten	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding
Cross-Section	0.34mm(AWG24)	0.34mm(AWG24)
IP Protection Level	IP67	IP67

DoubleEnd

M12Male、Straight



M8Female、Angle

PNP



3Pins (PNP)

Male Female



Jacket		0.25mm ²	Partnumber
Stock	PVC	GY	M12A-M03S/M8-F03AL2-2.0PVC/GY
	PVC	BK	M12A-M03S/M8-F03AL2-2.0PVC/BK
	PUR	GY	M12A-M03S/M8-F03AL2-2.0PUR/GY
Stock	PUR	BK	M12A-M03S/M8-F03AL2-2.0PUR/BK
High-Flexible		GY	M12A-M03S/M8-F03AL2-2.0HF/GY
Stock	H-F	BK	M12A-M03S/M8-F03AL2-2.0HF/BK
Stock	Anti-Welding	OG	M12A-M03S/M8-F03AL2-2.0AW/GY

Comment:Length Could be Customized , standard length is 2 meters

If need B , D code , please change M12A to M12B or M12 D ;

Technical Parameter:

3Pins	
Rated voltage	60v
End-Tighten	Metal Nut
Cable Connection	Premolding
Cross-Section	0.34mm(AWG24)
IP Protection Level	IP67


4.1.37

DoulbeEnd


M12Male、Straight

M12Female、Angle


PNP

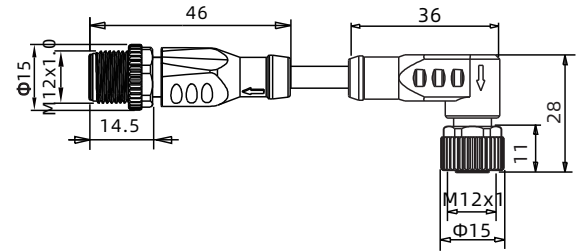

3Pins (PNP)

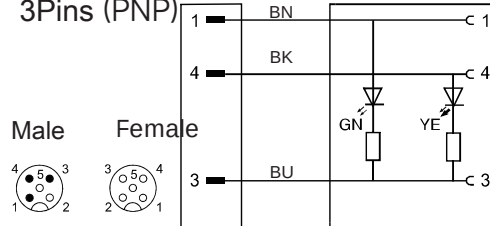

4Pins (PNP)

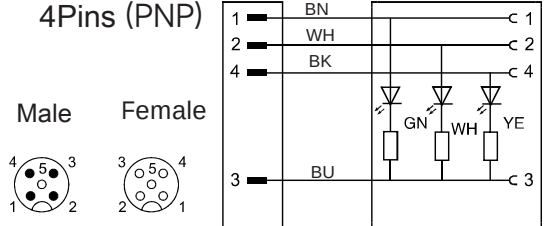

Jacket	0.25mm2	Partnumber	Partnumber	
PVC	GY	M12A-M03S/F03AL2-2.0PVC/GY	M12A-M04S/F04AL2-2.0PVC/GY	Stock
PVC	BK	M12A-M03S/F03AL2-2.0PVC/BK	M12A-M04S/F04AL2-2.0PVC/BK	
PUR	GY	M12A-M03S/F03AL2-2.0PUR/GY	M12A-M04S/F04AL2-2.0PUR/GY	
PUR	BK	M12A-M03S/F03AL2-2.0PUR/BK	M12A-M04S/F04AL2-2.0PUR/BK	Stock
High-Flexible	GY	M12A-M03S/-F03AL2-2.0HF/GY	M12A-M04S/F04AL2-2.0HF/GY	
High-Flexible	BK	M12A-M03S/-F03AL2-2.0HF/BK	M12A-M04S/F04AL2-2.0HF/BK	Stock
Anti-Welding	OG	M12A-M03S/F03AL2-2.0AW/OG	M12A-M04S/F04AL2-2.0AW/OG	Stock

DoubleEnd


M12Male、

Straight


M12Female、

Angle,PNP

5Pins (PNP)

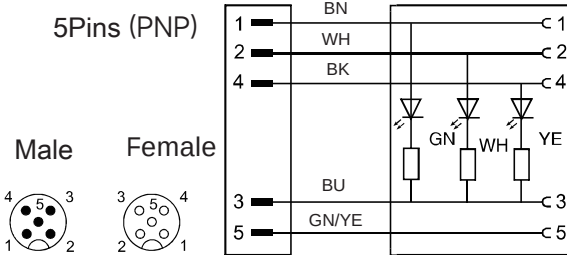

3Pins (PNP)

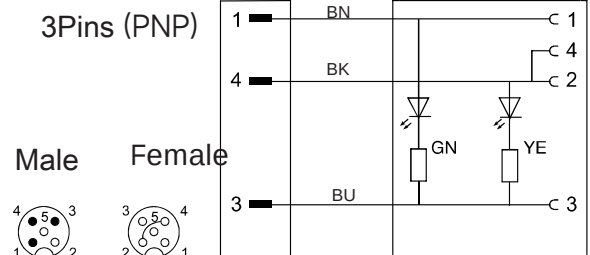

Jacket	0.25mm2	Partnumber	Partnumber	
PVC	GY	M12A-M05S/F05AL2-2.0PVC/GY	M12A-M03S/F04AL2-2.0PVC/GY	Stock
PVC	BK	M12A-M05S/F05AL2-2.0PVC/BK	M12A-M03S/F04AL2-2.0PVC/BK	
PUR	GY	M12A-M05S/F05AL2-2.0PUR/GY	M12A-M03S/F04AL2-2.0PUR/GY	
PUR	BK	M12A-M05S/F05AL2-2.0PUR/BK	M12A-M03S/F04AL2-2.0PUR/BK	Stock
High-Flexible	GY	M12A-M05S/F05AL2-2.0HF/GY	M12A-M03S/F04AL2-2.0HF/GY	
High-Flexible	BK	M12A-M05S/F05AL2-2.0HF/GY	M12A-M03S/F04AL2-2.0HF/BK	Stock
Anti-Welding	OG	M12A-M05S/F05AL2-2.0AW/OG	M12A-M03S/F04AL2-2.0AW/OG	Stock


Comment:Length Could be Customized , standard length is 2 meters

If need B , D code , please change M12A to M12B or M12 D ;

Technical Parameter:


	3Pins	4Pins	5Pins
Rated voltage	250v	250V	125V
End-Tighten	Metal Nut	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding	Premolding
Cross-Section	0.34mm(AWG24)	0.34mm(AWG24)	0.25mm(AWG24)
IP Protection Level	IP67	IP67	IP67

SingleEnd
M12Male-Straight
Shield

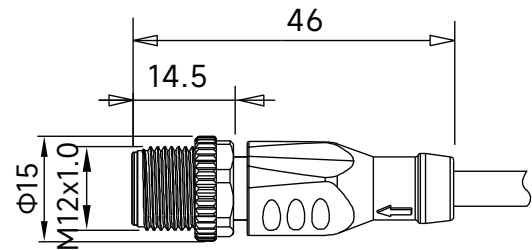

3Pins


Male



Partnumber

4Pins

Male



Partnumber

Jacket 0.34mm2

PVC

GY

M12A-M03S-2.0PVC/GY-SH

M12A-M04S-2.0PVC/GY-SH

Stock

PUR

BK

M12A-M03S-2.0PUR/BK-SH


M12A-M04S-2.0PUR/BK-SH

SingleEnd
M12Male
-Straight
Shield



5Pins



Male



Partnumber

8Pins

Male



Partnumber

Jacket 0.34mm2

PVC

GY

M12A-M05S-2.0PVC/GY-SH

M12A-M08S-2.0PVC/GY-SH

Stock

PUR

BK

M12A-M05S-2.0PUR/BK-SH

M12A-M08S-2.0PUR/BK-SH

Comment:Length Could be Customized , standard length is 2 meters



If need B , D code , please change M12A to M12B or M12 D ;

Technical Parameter:

	3Pins	4Pins	5Pins	8Pins
Rated voltage	250v	250V	125V	60V
End-Tighten	Metal Nut	Metal Nut	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding	Premolding	Premolding
Cross-Section	0.34mm(AWG24)	0.34mm(AWG24)	0.25mm(AWG24)	0.25mm(AWG24)
IP Protection Level	IP67	IP67	IP67	IP67


4.1.39

SingleEnd
M12Male-
Angle
Shield

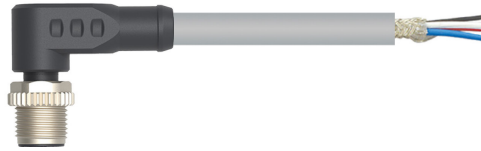

Jacket		0.34mm2	3Pins	4Pins	Partnumber	Partnumber	Stock
PVC	GY				M12A-M03A-2.0PVC/GY-SH	M12A-M04A-2.0PVC/GY-SH	
PUR	BK				M12A-M03A-2.0PUR/BK-SH	M12A-M04A-2.0PUR/BK-SH	

SingleEnd
M12Male-
Angle
Shield

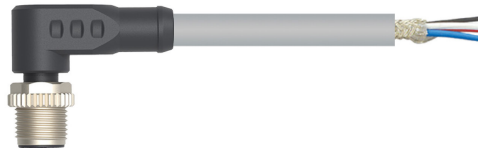

Jacket		0.34mm2	5Pins	8Pins	Partnumber	Partnumber	Stock
PVC	GY				M12A-M05A-2.0PVC/GY-SH	M12A-M08A-2.0PVC/GY-SH	
PUR	BK				M12A-M05A-2.0PUR/BK-SH	M12A-M08A-2.0PUR/BK-SH	


Comment:Length Could be Customized , standard length is 2 meters

If need B , D code , please change M12A to M12B or M12 D ;

Technical Parameter:



	3Pins	4Pins	5Pins	8Pins
Rated voltage	250v	250V	125V	60V
End-Tighten	Metal Nut	Metal Nut	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding	Premolding	Premolding
Cross-Section	0.34mm(AWG24)	0.34mm(AWG24)	0.25mm(AWG24)	0.25mm(AWG24)
IP Protection Level	IP67	IP67	IP67	IP67

SingleEnd
M12Female-Straight
Shield

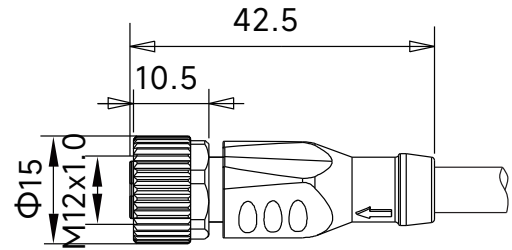

3Pins



Female



Partnumber

4Pins

Female



Partnumber



Jacket	0.34mm2		
PVC	GY	M12A-F03S-2.0PVC/GY-SH	M12A-F04S-2.0PVC/GY-SH
Stock PUR	BK	M12A-F03S-2.0PUR/BK-SH	M12A-F04S-2.0PUR/BK-SH

SingleEnd
M12Female-Straight
Shield



5Pins



Female



Partnumber

8Pins

Female



Partnumber

Jacket	0.34mm2		
PVC	GY	M12A-F05S-2.0PVC/GY-SH	M12A-F08S-2.0PVC/GY-SH
Stock PUR	BK	M12A-F05S-2.0PUR/BK-SH	M12A-F08S-2.0PUR/BK-SH

Comment:Length Could be Customized , standard length is 2 meters

If need B , D code , please change M12A to M12B or M12 D ;



Technical Parameter:

	3Pins	4Pins	5Pins	8Pins
Rated voltage	250v	250V	125V	60V
End-Tighten	Metal Nut	Metal Nut	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding	Premolding	Premolding
Cross-Section	0.34mm(AWG24)	0.34mm(AWG24)	0.25mm(AWG24)	0.25mm(AWG24)
IP Protection Level	IP67	IP67	IP67	IP67

4.1.41



SingleEnd
M12Female-Angle
Shield

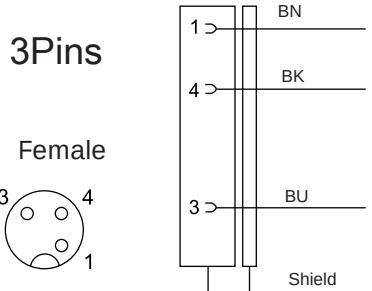

					
					
Jacket	0.34mm2	Partnumber		Partnumber	
PVC	GY	/		M12A-F04A-2.0PVC/GY-SH	
PUR	BK	M12A-F03A-2.0PUR/BK-SH		M12A-F04A-2.0PUR/BK-SH	
				Stock	

SingleEnd
M12Female-Angle
Shield

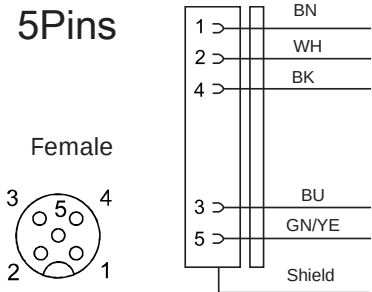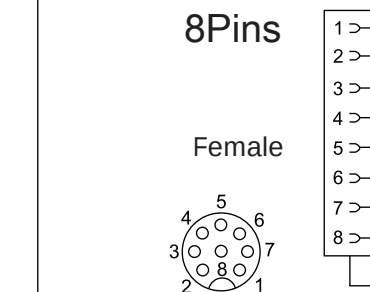

		 5Pins  Female Partnumber	 8Pins  Female Partnumber
Jacket	0.34mm ²		
PVC	GY	M12A-F05A-2.0PVC/GY-SH	M12A-F08A-2.0PVC/GY-SH
PUR	BK	M12A-F05A-2.0PUR/BK-SH	M12A-F08A-2.0PUR/BK-SH
		Stock	




Comment:Length Could be Customized , standard length is 2 meters

If need B , D code , please change M12A to M12B or M12 D ;

Technical Parameter:

	3Pins	4Pins	5Pins	8Pins
Rated voltage	250v	250V	125V	60V
End-Tighten	Metal Nut	Metal Nut	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding	Premolding	Premolding
Cross-Section	0.34mm(AWG24)	0.34mm(AWG24)	0.25mm(AWG24)	0.25mm(AWG24)
IP Protection Level	IP67	IP67	IP67	IP67

SingleEnd
M12Male
Shield

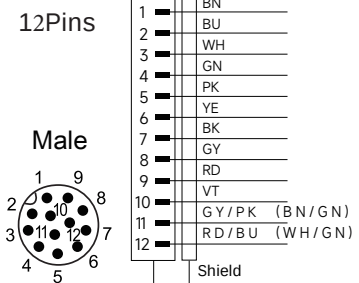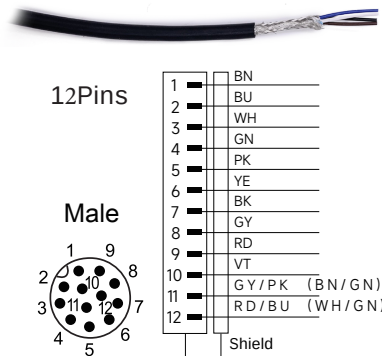

Jacket 0.3 4mm2



Partnumber

Partnumber

Stock PUR BK M12A-M12S-2.0PUR/BK-SH

M12A-M12A-2.0PUR/BK-SH

SingleEnd
M12Female
Shield

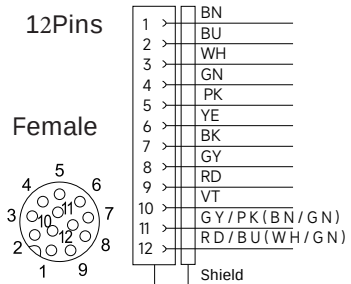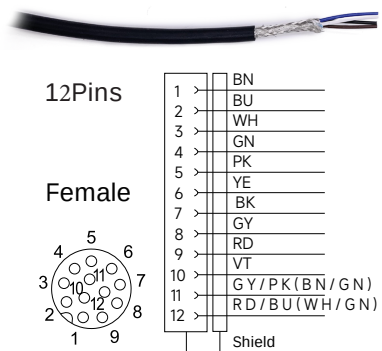

Jacket 0.34mm2

Partnumber

Partnumber

Stock PUR BK M12A-F12S-2.0PUR/BK-SH


M12A-F12A-2.0PUR/BK-SH

Comment:Length Could be Customized , standard length is 2 meters
If need B, D code, please change M12A to M12B or M12 D;



Technical Parameter:

	12Pins
Rated voltage	30 V
End-Tighten	Metal Nut
Cable Connection	Premolding
Cross-Section	0.25/0.14mm
IP Protection Level	IP67



DoubleEnd
M12 Male
M12 Female
Straight Shield

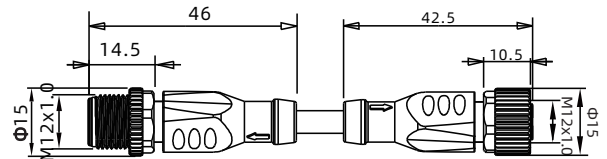

3Pins



4Pins



Jacket 0.34mm²



PVC	GY	M12A-M03S/F03S-2.0PVC/GY-SH	M12A-M04S/F04S-2.0PVC/GY-SH
PUR	BK	M12A-M03S/F03S-2.0PUR/BK-SH	M12A-M04S/F04S-2.0PUR/BK-SH

Stock



DoubleEnd
M12 Male
M12 Female
Straight Shield



5Pins



8Pins



Jacket 0.34mm²

PVC	GY	M12A-M05S/F05S-2.0PVC/GY-SH	M12A-M08S/F08S-2.0PVC/GY-SH
PUR	BK	M12A-M05S/F05S-2.0PUR/BK-SH	M12A-M08S/F08S-2.0PUR/BK-SH


Stock

Comment:Length Could be Customized , standard length is 2 meters
If need B, D code, please change M12A to M12B or M12 D;



Technical Parameter:

	3Pins	4Pins	5Pins	8Pins
Rated voltage	250v	250V	125V	60V
End-Tighten	Metal Nut	Metal Nut	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding	Premolding	Premolding
Cross-Section	0.34mm(AWG24)	0.34mm(AWG24)	0.25mm(AWG24)	0.25mm(AWG24)
IP Protection Level	IP67	IP67	IP67	IP67



DoubleEnd
M12 Male
Straight
M12 Female
Angle Shield

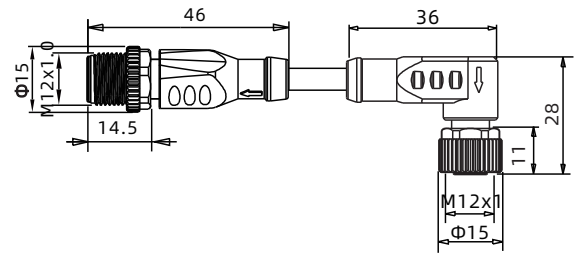

3Pins



4Pins



Jacket 0.34mm²

Partnumber

Partnumber

PVC GY M12A-M03S/F03A-2.0PVC/GY-SH

M12A-M04S/F04A-2.0PVC/GY-SH



Stock PUR BK M12A-M03S/F03A-2.0PUR/BK-SH

M12A-M04S/F04A-2.0PUR/BK-SH



DoubleEnd
M12 Male
Straight
M12 Female
Angle Shield



5Pins



8Pins



Jacket 0.34mm²

Partnumber

Partnumber

PVC GY M12A-M05S/F05A-2.0PVC/GY-SH

M12A-M08S/F08A-2.0PVC/GY-SH

Stock PUR BK M12A-M05S/F05A-2.0PUR/BK-SH


M12A-M08S/F08A-2.0PUR/BK-SH

Comment:Length Could be Customized , standard length is 2 meters


Technical Parameter:

	3Pins	4Pins	5Pins	8Pins
Rated voltage	250v	250V	125V	60V
End-Tighten	Metal Nut	Metal Nut	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding	Premolding	Premolding
Cross-Section	0.34mm(AWG24)	0.34mm(AWG24)	0.25mm(AWG24)	0.25mm(AWG24)
IP Protection Level	IP67	IP67	IP67	IP67

Y-Type Splitter
M12 Male,
M12 Female
Straight

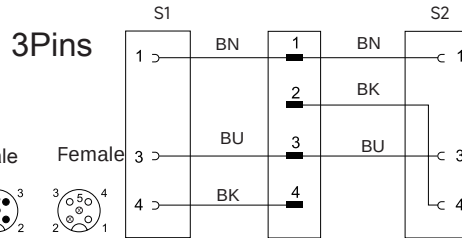


Partnumber

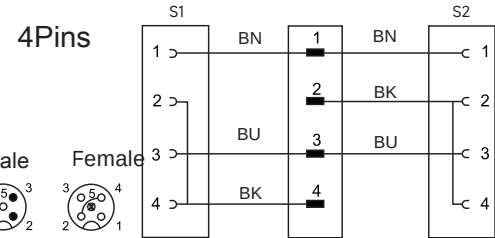


Partnumber

Jacket	0.34mm2		Partnumber	Partnumber
Stock	PVC	GY	M12Y-M04S/2F03S-2.0PVC/GY	M12Y-M04S/2F04S-2.0PVC/GY
	PVC	BK	M12Y-M04S/2F03S-2.0PVC/BK	M12Y-M04S/2F04S-2.0PVC/BK
	PUR	GY	M12Y-M04S/2F03S-2.0PUR/GY	M12Y-M04S/2F04S-2.0PUR/GY
Stock	PUR	BK	M12Y-M04S/2F03S-2.0PUR/BK	M12Y-M04S/2F04S-2.0PUR/BK
	High-Flexible	GY	M12Y-M04S/2F03S-2.0HF/GY	M12Y-M04S/2F04S-2.0HF/GY
Stock	H-F	BK	M12Y-M04S/2F03S-2.0HF/BK	M12Y-M04S/2F04S-2.0HF/BK
Stock	Anti-Welding	OG	M12Y-M04S/2F03S-2.0AW/BK	M12Y-M04S/2F04S-2.0AW/BK

Y-Type Splitter
M12 Male,
Straight
M12 Female,
Straight

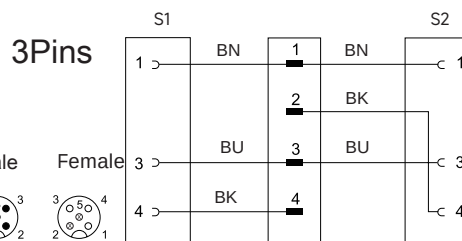

Partnumber

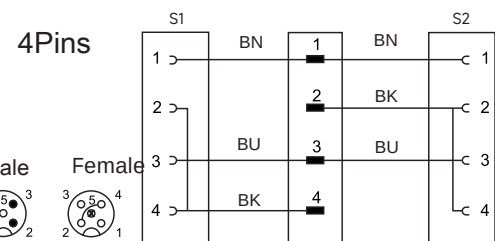

Partnumber

Jacket	0.34mm2		Partnumber	Partnumber
Stock	PVC	GY	M12Y-M04S-1.0/2F03S-2.0PVC/GY	M12Y-M04S-1.0/2F04S-2.0PVC/GY
	PVC	BK	M12Y-M04S-1.0/2F03S-2.0PVC/BK	M12Y-M04S-1.0/2F04S-2.0PVC/BK
	PUR	GY	M12Y-M04S-1.0/2F03S-2.0PUR/GY	M12Y-M04S-1.0/2F04S-2.0PUR/GY
Stock	PUR	BK	M12Y-M04S-1.0/2F03S-2.0PUR/BK	M12Y-M04S-1.0/2F04S-2.0PUR/BK
	High-Flexible	GY	M12Y-M04S-1.0/2F03S-2.0HF/GY	M12Y-M04S-1.0/2F04S-2.0HF/GY
Stock	H-F	BK	M12Y-M04S-1.0/2F03S-2.0HF/BK	M12Y-M04S-1.0/2F04S-2.0HF/BK
Stock	Anti-Welding	OG	M12Y-M04S-1.0/2F03S-2.0AW/OG	M12Y-M04S-1.0/2F04S-2.0AW/OG

Comment:Length Could be Customized , standard length is 2 meters

Technical Parameter:

	3Pins	4Pins
Rated voltage	60v	30V
End-Tighten	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding
Cross-Section	0.25mm(AWG24)	0.25mm(AWG24)
IP Protection Level	IP67	IP67

Y-Type Splitter

M12 Male,
Straight
M12 Female,
Angle Shield



Jacket		0.34mm2		3Pins		4Pins	
				Partnumber		Partnumber	
PVC	GY	M12Y-M04S/2F03A-2.0PVC/GY		M12Y-M04S/2F04A-2.0PVC/GY		Stock	
PVC	BK	M12Y-M04S/2F03A-2.0PVC/BK		M12Y-M04S/2F04A-2.0PVC/BK			
PUR	GY	M12Y-M04S/2F03A-2.0PUR/GY		M12Y-M04S/2F04A-2.0PUR/GY			
PUR	BK	M12Y-M04S/2F03A-2.0PUR/BK		M12Y-M04S/2F04A-2.0PUR/BK		Stock	
High-Flexible	GY	M12Y-M04S/2F03A-2.0HF/GY		M12Y-M04S/2F04A-2.0HF/GY			
High-Flexible	BK	M12Y-M04S/2F03A-2.0HF/BK		M12Y-M04S/2F04A-2.0HF/BK		Stock	
Anti-Welding	OG	M12Y-M04S/2F03A-2.0AW/OG		M12Y-M04S/2F04A-2.0AW/OG		Stock	

Y-Splitter

M12 Male,
Straight
M12 Female,
Angle Shield




Jacket		0.34mm2		3Pins		4Pins	
				Partnumber		Partnumber	
PVC	GY	M12Y-M04S-1.0/2F03A-2.0PVC/GY		M12Y-M04S-1.0/2F04A-2.0PVC/GY		Stock	
PVC	BK	M12Y-M04S-1.0/2F03A-2.0PVC/BK		M12Y-M04S-1.0/2F04A-2.0PVC/BK			
PUR	GY	M12Y-M04S-1.0/2F03A-2.0PUR/GY		M12Y-M04S-1.0/2F04A-2.0PUR/GY			
PUR	BK	M12Y-M04S-1.0/2F03A-2.0PUR/BK		M12Y-M04S-1.0/2F04A-2.0PUR/BK		Stock	
High-Flexible	GY	M12Y-M04S-1.0/2F03A-2.0HF/GY		M12Y-M04S-1.0/2F04A-2.0HF/GY			
High-Flexible	BK	M12Y-M04S-1.0/2F03A-2.0HF/BK		M12Y-M04S-1.0/2F04A-2.0HF/BK		Stock	
Anti-Welding	OG	M12Y-M04S-1.0/2F03A-2.0AW/OG		M12Y-M04S-1.0/2F04A-2.0AW/OG		Stock	

Comment:Length Could be Customized , standard length is 2 meters

Technical Parameter:


	3Pins	4Pins
Rated voltage	60v	30V
End-Tighten	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding
Cross-Section	0.25mm(AWG24)	0.25mm(AWG24)
IP Protection Level	IP67	IP67

Y- Splitter
M12 Male、
M8 Female、
Straight

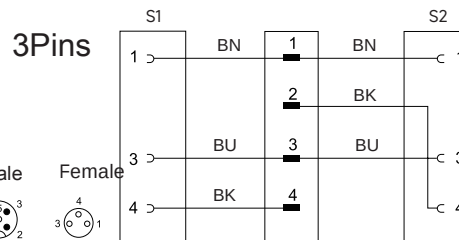

Jacket	0.34mm2	Partnumber
Stock PVC	GY	M12Y-M04S/2M8-F03S-2.0PVC/GY
PVC	BK	M12Y-M04S/2M8-F03S-2.0PVC/BK
PUR	GY	M12Y-M04S/2M8-F03S-2.0PUR/GY
Stock PUR	BK	M12Y-M04S/2M8-F03S-2.0PUR/BK
High-Flexible	GY	M12Y-M04S/2M8-F03S-2.0HF/GY
Stock H-F	BK	M12Y-M04S/2M8-F03S-2.0HF/BK
Stock Anti-Welding	OG	M12Y-M04S/2M8-F03S-2.0AW/OG

Y-Splitter
M12 Male、
M8 Female、
Straight

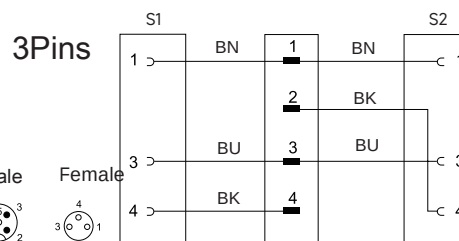

Jacket	0.34mm2	Partnumber
Stock PVC	GY	M12Y-M04S-1.0/2M8-F03S-2.0PVC/GY
PVC	BK	M12Y-M04S-1.0/2M8-F03S-2.0PUR/BK
PUR	GY	M12Y-M04S-1.0/2M8-F03S-2.0PVC/GY
Stock PUR	BK	M12Y-M04S-1.0/2M8-F03S-2.0PUR/BK
High-Flexible	GY	M12Y-M04S-1.0/2M8-F03S-2.0PVC/GY
Stock H-F	BK	M12Y-M04S-1.0/2M8-F03S-2.0PUR/BK
Stock Anti-Welding	OG	M12Y-M04S-1.0/2M8-F03S-2.0OG/OG

Comment:Length Could be Customized , standard length is 2 meters

Technical Parameter:

	3Pins	4Pins
Rated voltage	60v	30V
End-Tighten	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding
Cross-Section	0.25mm(AWG24)	0.25mm(AWG24)
IP Protection Level	IP67	IP67



Y-Splitter

M12 Male、Straight

M8 Female、Angle



3Pins

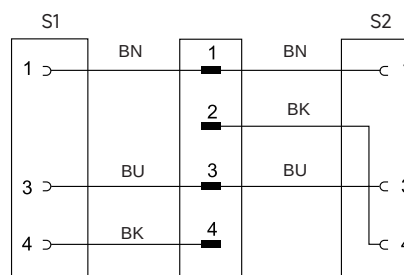

Jacket	0.34mm2	Partnumber	
PVC	GY	M12Y-M04S/2M8-F03A-2.0PVC/GY	Stock
PVC	BK	M12Y-M04S/2M8-F03A-2.0PVC/BK	
PUR	GY	M12Y-M04S/2M8-F03A-2.0PUR/GY	
PUR	BK	M12Y-M04S/2M8-F03A-2.0PUR/BK	Stock
High-Flexible	GY	M12Y-M04S/2M8-F03A-2.0HF/GY	
High-Flexible	BK	M12Y-M04S/2M8-F03A-2.0HF/BK	Stock
Anti-Welding	OG	M12Y-M04S/2M8-F03A-2.0AW/OG	Stock



Y-Splitter

M12 Male、Straight

M8 Female、Angle



3Pins

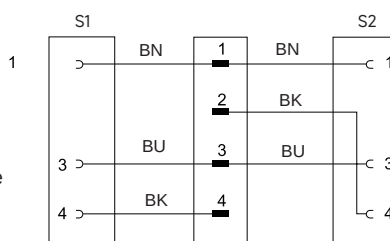

Jacket	0.34mm2	Partnumber	
PVC	GY	M12Y-M04S-1.0/2M8-F03A-2.0PVC/GY	Stock
PVC	BK	M12Y-M04S-1.0/2M8-F03A-2.0PVC/BK	
PUR	GY	M12Y-M04S-1.0/2M8-F03A-2.0PUR/GY	
PUR	BK	M12Y-M04S-1.0/2M8-F03A-2.0PUR/BK	Stock
High-Flexible	GY	M12Y-M04S-1.0/2M8-F03A-2.0HF/GY	
High-Flexible	BK	M12Y-M04S-1.0/2M8-F03A-2.0HF/BK	Stock
Anti-Welding	OG	M12Y-M04S-1.0/2M8-F03A-2.0AW/OG	Stock

Comment:Length Could be Customized , standard length is 2 meters


Technical Parameter:

	3Pins	4Pins
Rated voltage	60v	30V
End-Tighten	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding
Cross-Section	0.25mm(AWG24)	0.25mm(AWG24)
IP Protection Level	IP67	IP67

M12 Flange

M12 Male
Back Mounting


Screw M16

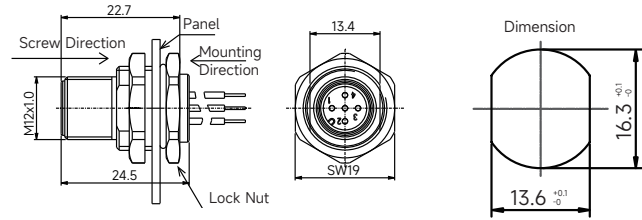

Code	4Pins		5Pins		8Pins	
	PartNumber	PartNumber	PartNumber	PartNumber	PartNumber	PartNumber
A	FLB-M12A-M04(M16)-0.5	FLB-M12A-M05(M16)-0.5	FLB-M12A-M08(M16)-0.5			
B	FLB-M12B-M04(M16)-0.5	FLB-M12B-M05(M16)-0.5	FLB-M12B-M08(M16)-0.5			
D	FLB-M12D-M04(M16)-0.5	FLB-M12D-M05(M16)-0.5	FLB-M12D-M08(M16)-0.5			

M12 Female
Back Mounting

Screw M16

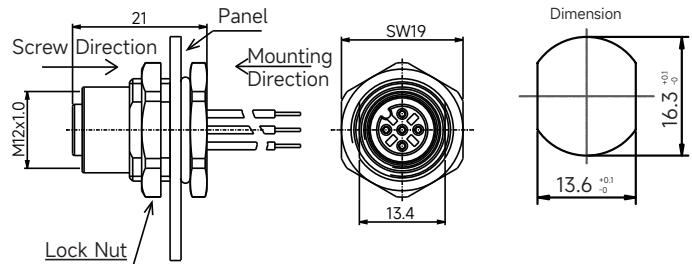

Code	4Pins		5Pins		8Pins	
	PartNumber	PartNumber	PartNumber	PartNumber	PartNumber	PartNumber
A	FLB-M12A-F04(M16)-0.5	FLB-M12A-F05(M16)-0.5	FLB-M12A-F08(M16)-0.5			
B	FLB-M12B-F04(M16)-0.5	FLB-M12B-F05(M16)-0.5	FLB-M12B-F08(M16)-0.5			
D	FLB-M12D-F04(M16)-0.5	FLB-M12D-F05(M16)-0.5	FLB-M12D-F08(M16)-0.5			

Comment:Length Could be Customized , standard length is 0.5 meters

Technical Parameter:


	4Pins	5Pins	8Pins
Rated voltage	250V	125V	60V
End-Tighten	Metal Nut	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding	Premolding
Cross-Section	0.34mm(AWG22)	0.34mm(AWG22)	0.25mm(AWG24)
IP Protection Level	IP67	IP67	IP67

Panel Mounting

M12 Male

Front Mounting

Screw M16x1.5

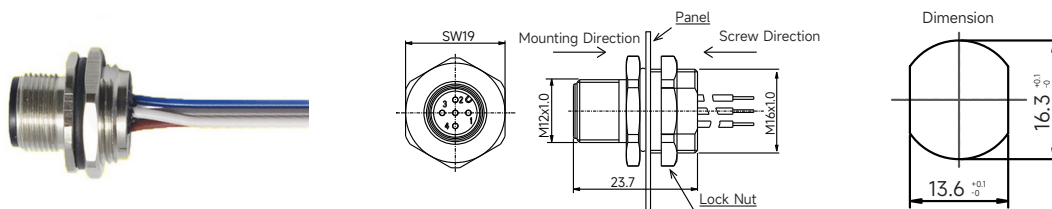


Code	PartNumber		
	4Pins	5Pins	8Pins
A	FLF-M12A-M04(M16)-0.5	FLF-M12A-M05(M16)-0.5	FLF-M12A-M08(M16)-0.5
B	FLF-M12B-M04(M16)-0.5	FLF-M12B-M05(M16)-0.5	FLF-M12B-M08(M16)-0.5
D	FLF-M12D-M04(M16)-0.5	FLF-M12D-M05(M16)-0.5	FLF-M12D-M08(M16)-0.5

M12 Female

Front Mounting

Screw M16x1.5

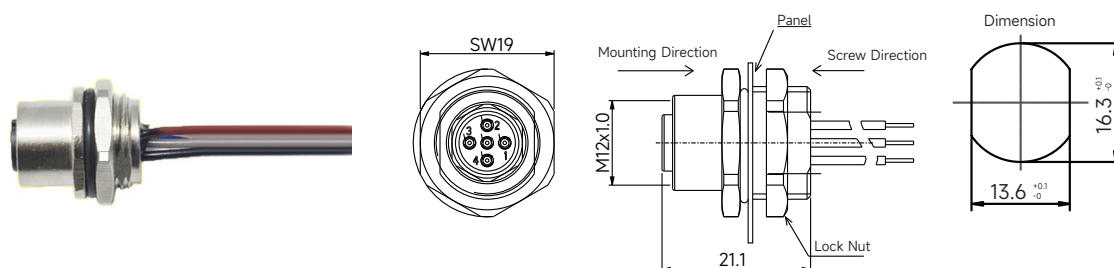



Code	PartNumber		
	4Pins	5Pins	8Pins
A	FLF-M12A-F04(M16)-0.5	FLF-M12A-F05(M16)-0.5	FLF-M12A-F08(M16)-0.5
B	FLF-M12B-F04(M16)-0.5	FLF-M12B-F05(M16)-0.5	FLF-M12B-F08(M16)-0.5
D	FLF-M12D-F04(M16)-0.5	FLF-M12D-F05(M16)-0.5	FLF-M12D-F08(M16)-0.5

Comment:Length Could be Customized , standard length is 0.5 meters

Technical Parameter:

	4Pins	5Pins	8Pins
Rated voltage	250V	125V	60V
End-Tighten	Metal Nut	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding	Premolding
Cross-Section	0.34mm(AWG22)	0.34mm(AWG22)	0.25mm(AWG24)
IP Protection Level	IP67	IP67	IP67

M12 Male Straight
SiteConnection

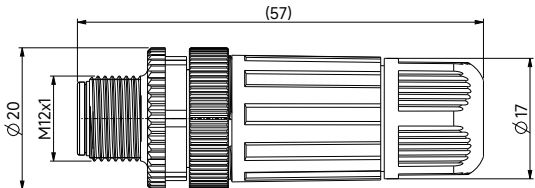

4Pins Male-6 interface Double hole






4Pins Double hole

4Pins Male-6 interface Single hole



4Pins Single hole

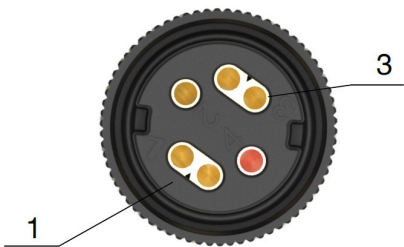




注： Pin1 and 3 could connect 2 wires

PartNumber	PartNumber
M12-M04S-YA	M12-M04S-YB

Technical Parameter:

	5.2-3.5 mm	4-8 mm
Rated voltage	60 V AC/DC	
Rated Current	max. 4 A	
Cross-Section	max. 0.75 mm ²	
Tighten	By Screw	
IP Protection Level	IP67- (EN 60529)	

M12 Y-Type
M12 Male
2xM8Fe male

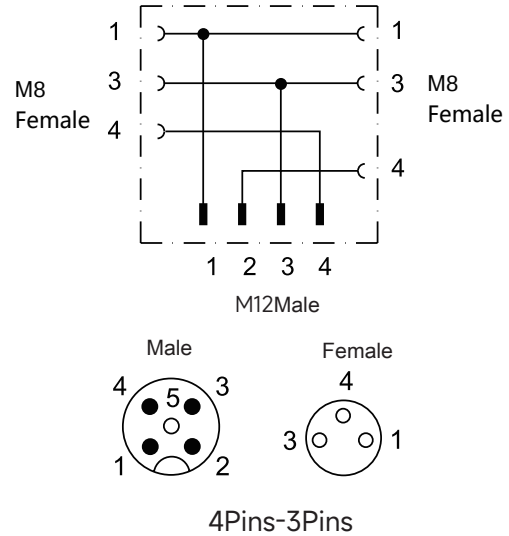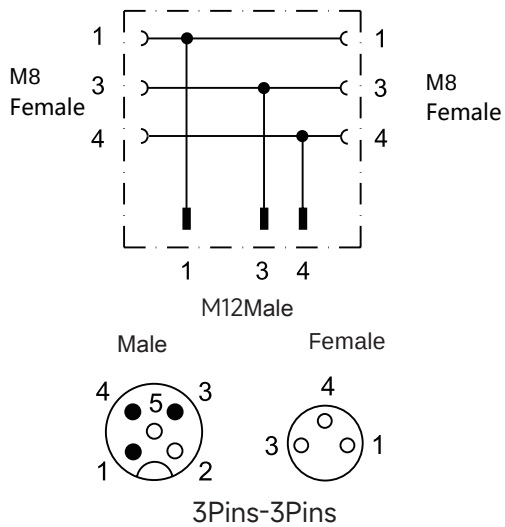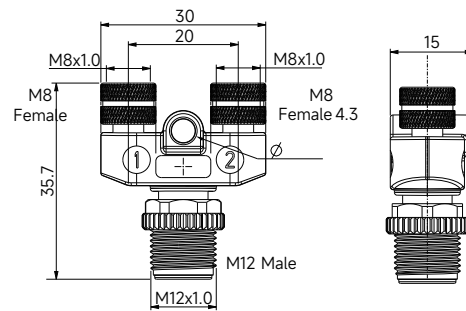

PartNumber	PartNumber
M12Y-M03S/2XM8-F03S-A	M12Y-M04S/2XM8-F03S-A




* Please refer to the connector installation tool for details 4.1.4

Technical Parameter:	3Pins/4Pins
Rated voltage	30 V AC/DC
Rated Current	max. 4A
Cable Connection	Metal Nut
IP Protection Level	IP67- (EN 60529)


M8 Y-Type

M8 Male

2xM8Female

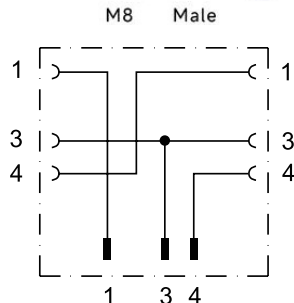



M8Male




3Pins-3Pins

PartNumber

M8Y-M03S/2F03S-A

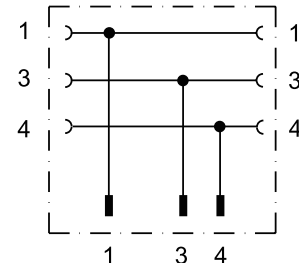

M8Male

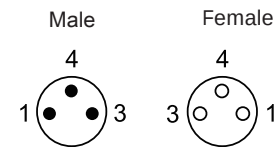


3Pins-3Pins


PartNumber

M8Y-M03S/2F03S-B

1. Female M8 2.Female

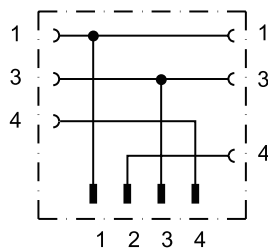

M8Male

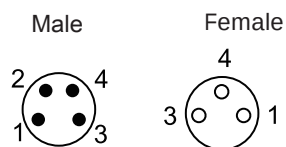


4Pins-3Pins


PartNumber

M8Y-M04S/2F03S-A

M8

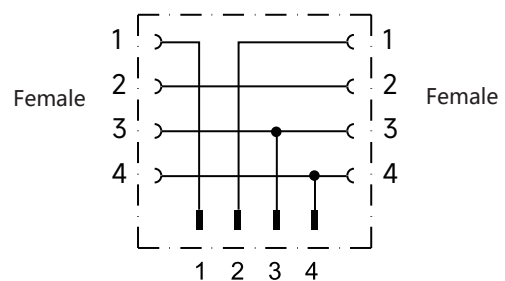

M8Male



4Pins-4Pins

PartNumber

M8Y-M04S/2F04S-A

Technical Parameter:

3Pins/4Pins

Rated voltage

30 V AC/DC

Rated Current

max. 2A

Cable Connection


Metal Nut

IP Protection Level

IP67- (EN 60529)


Y/T Connection

M12-M12-M12
(A/D/L Code)

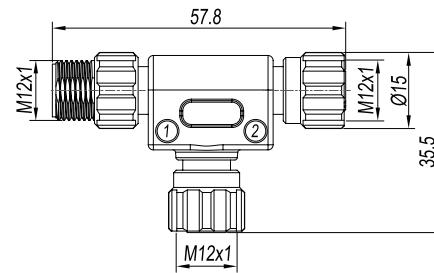


Y/T
Connection

1.Male 2.Female



Male Female




5Pins


PartNumber

M12TA-F05/M05-F05

1.Male 2.Female

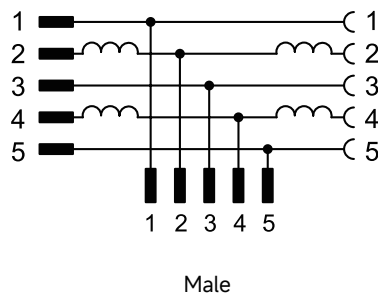

Male Female




5Pins Shield

PartNumber

M12TD-M05/M05-F05

1.Female 2.Female



Male Female





5Pins

PartNumber

M12TL-M04/2F04

Technical Parameter:	5Pins	5Pins	5Pins
Rated voltage	60 V AC/DC	60 V AC/DC	63 V AC/DC
Rated Current	max. 4A	max. 4A	max. 12A
Cable Connection		Metal Nut	
IP Protection Level		IP67	





T-Connection
M12-7/8"

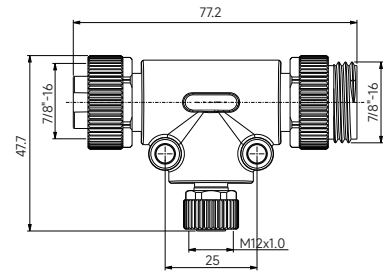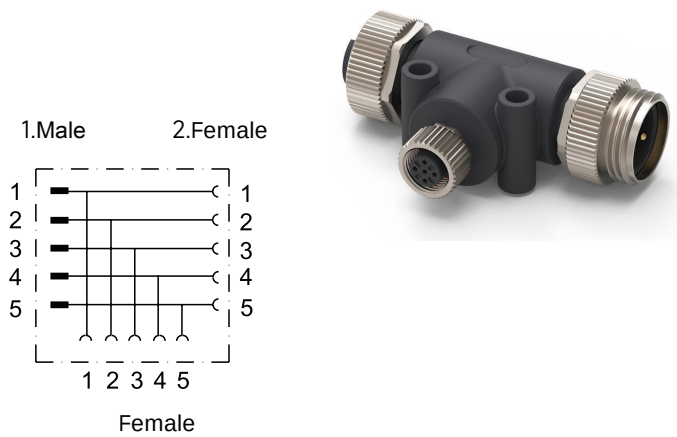

Y/T
Connection

7/8 T-Connection


7/8"-7/8"

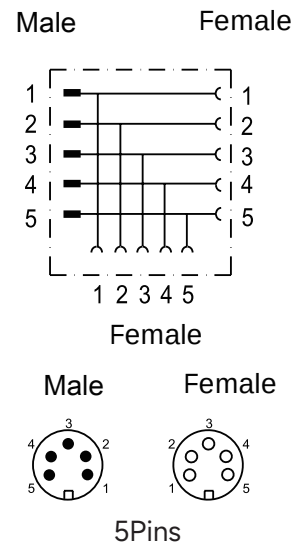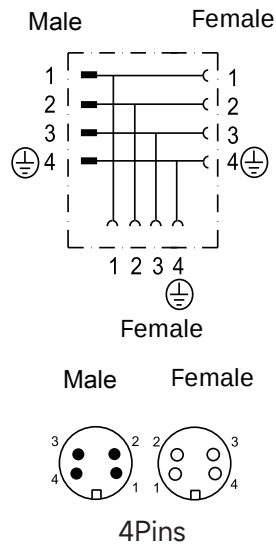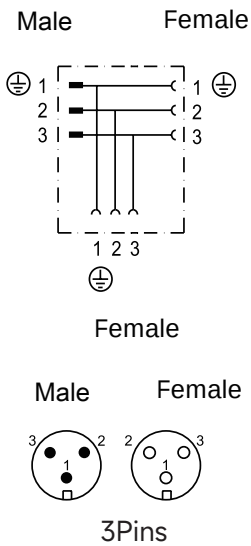

Technical Parameter:

3Pins	4Pins	5Pins
Rated voltage	600 V AC/DC	
Rated Current	max. 10A	max. 8A
Cable Connection	Metal Nut	
IP Protection Level	IP67-(EN 60529)	

Service Network

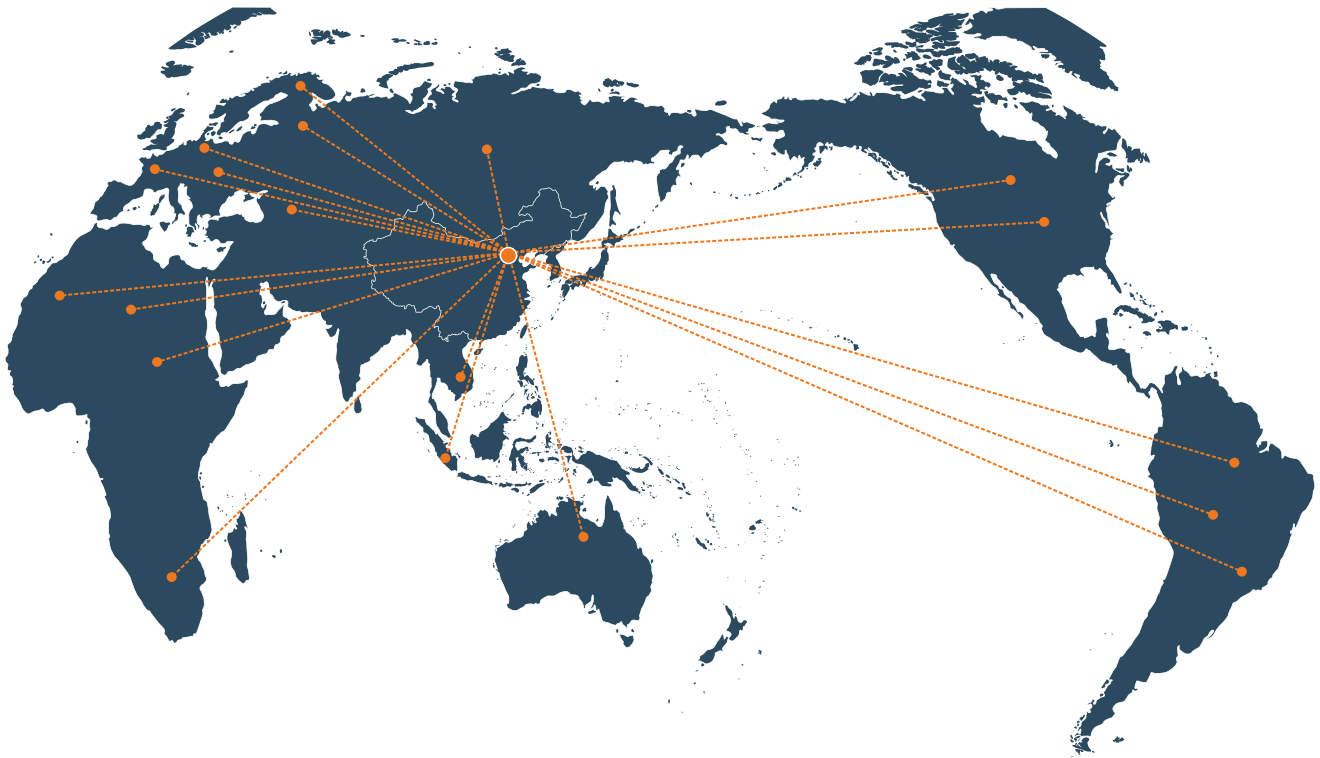

Address : No.655 GaojiRoad, Songjiang District, Shanghai City ,China

Zipcode: 201601

Whats App : +86 13052228269

E-Mail : jana.jiang@fadeya.com

Web : www.fadeya.com

FADEYA

Make Your Automation Project Easier

Hot Line:

+86 13052228269

Website : www.fadeya.com

Mail : jana.jiang@fadeya.com

Address : No.655 GaojiRoad, Songjiang District, Shanghai City ,China