

FADEYA



M8 connector CordSet

fadeya (shanghai) co . , Ltd

FADEYA

Automation Package Solution



Connector / Cordset


A-Coded		B-Coded		D-Coded		L-Coded		S-Coded		T-Coded		X-Coded	
Male	Female	Male	Female	Male	Female	Male	Female	Male	Female	Male	Female	Male	Female

Length Could be Customized , unit : cm




M8 connector designation

M8 Site Connector Naming


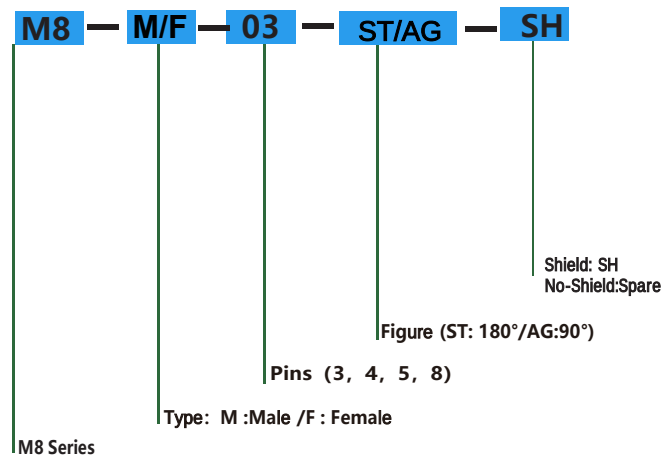


M8 CordSet naming

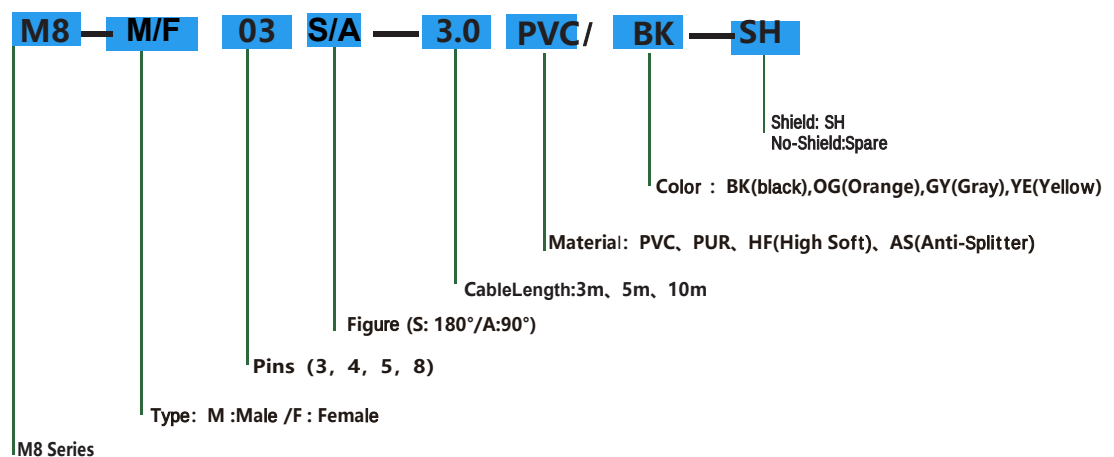

M8 Connector

M8 Male Straight

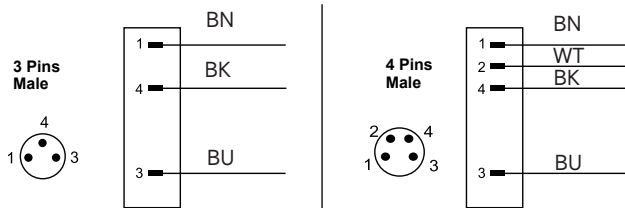
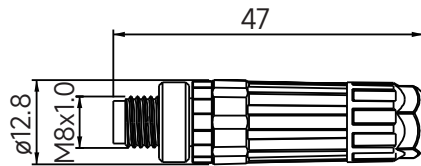


PartNumber

M8-M03S

M8-M04S

M8 Female Straight

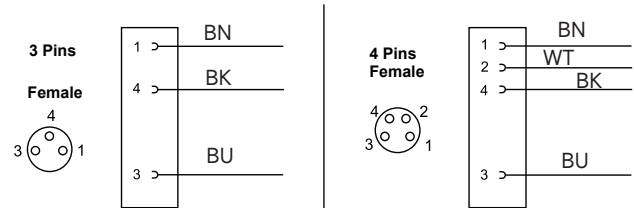
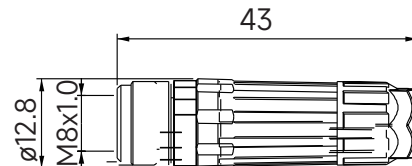


PartNumber

M8-F03S

M8-F04S

M8 Male Angle

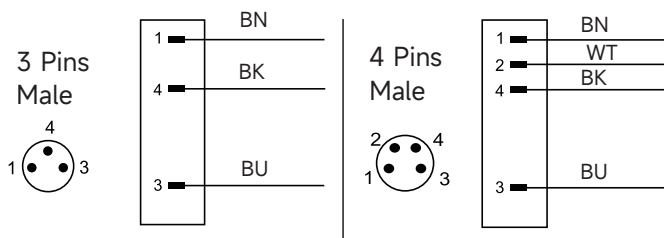
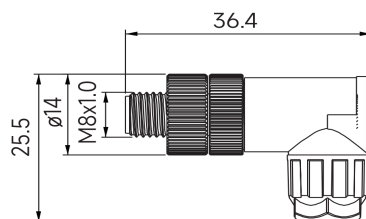


PartNumber

M8-M03A

M8-M04A

M8 Female Angle

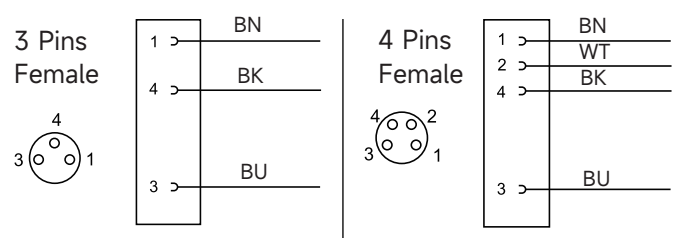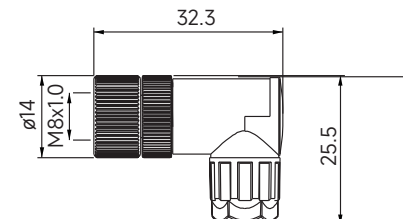

PartNumber



M8-F03A

M8-F04A

Technical Parameter:

	3 Pins	4 Pins
Rated voltage	60v	30V
End-Tighten	Metal nut locking	
Cable Connection	By Screw	
Cross-Section	0.14-0.5mm2	
Cable Out-diameter	3.5-5mm	
IP-Protection Level	IP67	


M8 Male
Shield
Straight



Male, Straight , 3 Pins, Shield

PartNumber

M8SH-M03S





Male ,Straight, 4Pins, Shield

PartNumber

M8SH-M04S


M8
Female
Shield
Straight

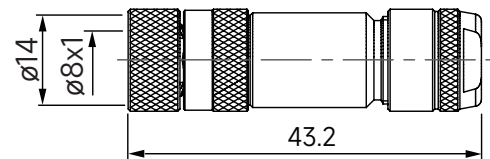

Female ,Straight ,3Pins , Shield

PartNumber

M8SH-F03S



Female, Straight, 4Pins, shield


PartNumber

M8SH-F04S

Technical Parameter:



	3 Pins	4 Pins
Rated voltage	60v	30V
Locak Way	Metal Nut	Metal Nut
Connection	By Screw	By Screw
Core	0.25mm(AWG24)	0.25mm(AWG24)
IP Protection	IP67	IP67

M8 Male Single End

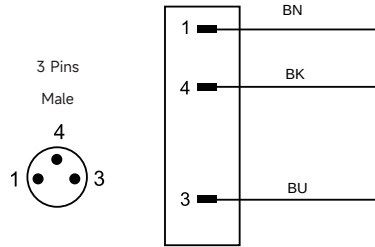



PartNumber

PVC , 2 meters , Gray	M8-M03S-2.0PVC/GR
PVC , 5 meters , Black	M8-M03S-5.0PVC/BK
PUR , 2 meters , Gray	M8-M03S-2.0PUR/GY
PUR , 5 meters , Black	M8-M03S-5.0PUR/BK
HighFlexible, 2 meters , Gray	M8-M03S-2.0HF/GY
HighFlexible, 5 meters , Black	M8-M03S-5.0HF/BK
Anti-Welding	M8-M03S-5.0AW/OG

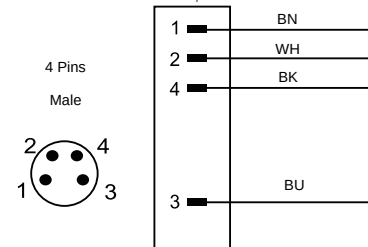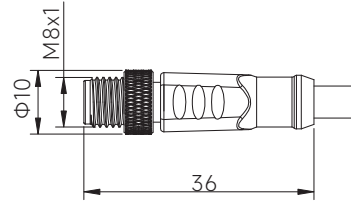



PartNumber

M8-M04S-2.0PVC/GY
M8-M04S-5.0PVC/BK
M8-M04S-2.0PUR/GY
M8-M04S-5.0PUR/BK
M8-M04S-5.0HF/GY
M8-M04S-5.0HF/BK
M8-M04S-5.0AW/OG

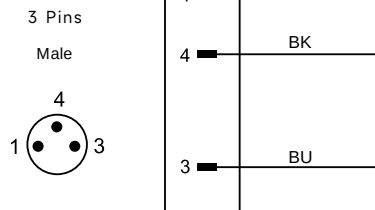

PartNumber

PVC , 2 meters , Gray	M8-M03A-2.0PVC/GR
PVC , 5 meters , Black	M8-M03A-5.0PVC/BK
PUR , 2 meters , Gray	M8-M03A-2.0PUR/GR
PUR , 5 meters , Black	M8-M03A-5.0PUR/BK
HighFlexible, 2 meters , Gray	M8-M03A-2.0HF/GR
HighFlexible, 5 meters , Black	M8-M03A-5.0HF/BK
Anti-Welding	M8-M03A-AW/OG

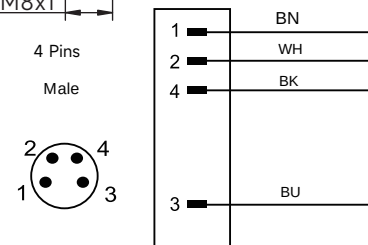

PartNumber


M8-M04A-2.0PVC/GR
M8-M04A-5.0PVC/BK
M8-M04A-2.0PUR/GY
M8-M04A-5.0PUR/BK
M8-M04A-2.0HF/GR
M8-M04A-5.0HF/BK
M8-M04A-AW/OG

Length Could be customized



Technical Parameter:

	3 Pins	4 Pins
Rated voltage	60V	30V
Tighten Way	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding
Cross-Section	0.25mm(AWG24)	0.25mm(AWG24)
IP-Protection	IP67	IP67

M8 Female Single End

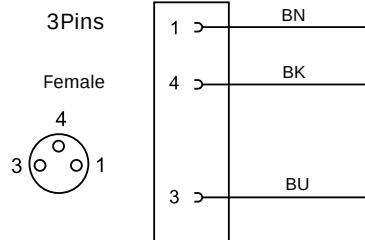


PartNumber

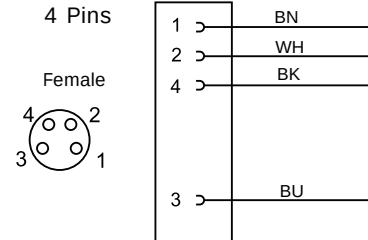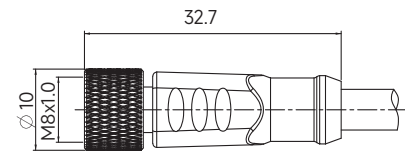


PartNumber

PVC , 2 meters , Gray	M8-F03S-2.0PVC/GR	M8-F04S-2.0PVC/GR
PVC , 5 meters , Black	M8-F03S-5.0PVC/BK	M8-F04S-5.0PVC/BK
PUR , 2 meters , Gray	M8-F03S-2.0PUR/GR	M8-F04S-2.0PUR/GY
PUR , 5 meters , Black	M8-F03S-5.0PUR/BK	M8-F04S-5.0PUR/BK
HighFlexible , 2 meters , Gray	M8-F03S-2.0HF/GR	M8-F04S-2.0HF/GR
HighFlexible , 5 meters , Black	M8-F03S-5.0HF/BK	M8-F04S-5.0HF/BK
Anti-Welding	M8-F03S-AW/OG	M8-F04S -AW/OG

Female SingleEnd

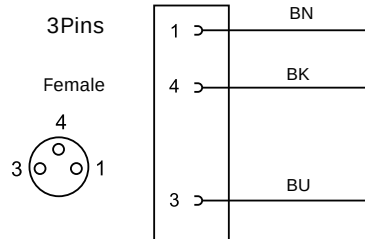

PartNumber

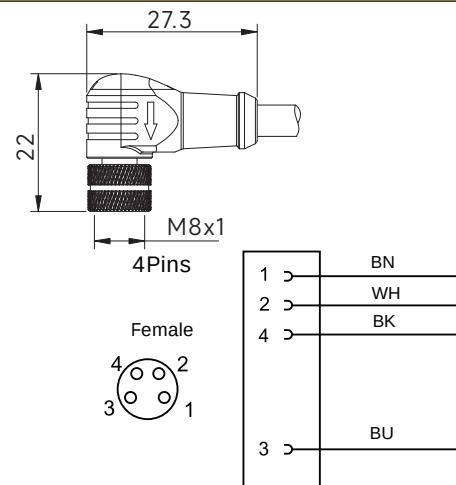

PartNumber






PVC , 2 meters , Gray	M8-F03A-2.0PVC/GR	M8-F04A-2.0PVC/GR
PVC , 5 meters , Black	M8-F03A-5.0PVC/BK	M8-F04A-5.0PVC/BK
PUR , 2 meters , Gray	M8-F03A-2.0PUR/GR	M8-F04A-2.0PUR/GR
PUR , 5 meters , Black	M8-F03A-5.0PUR/BK	M8-F04A-5.0PUR/BK
HighFlexible , 2 meters , Gray	M8-F03A-2.0HF/GR	M8-F04A-2.0HF/GR
HighFlexible , 5 meters , Black	M8-F03A-5.0HF/BK	M8-F04A-5.0HF/BK
Anti-Welding	M8-F03A-AW/OG	M8-F04A-AW/OG

Cable Length could be customized







Technical Parameter:

	3Pins	4Pins
Rated voltage	60V	30V
Tighten Way	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding
Cross-Section	0.25mmAWG24)	0.25mm(AWG24)
IP-Protection	IP67	IP67

M8 Female
SingleEnd
WithLED

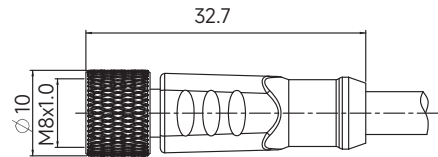

PartNumber		PartNumber
PVC , 2 meters , Gray,LED	M8-F03SLED-2.0PVC/GR	M8-F04SLED-2.0PVC/GR
PVC , 2 meters , Black,LED	M8-F03SLED-5.0PVC/GR	M8-F04SLED-5.0PVC/GR
PUR , 2 meters , Gray,LED	M8-F03SLED-2.0PUR/GR	M8-F04SLED-2.0PUR/GR
PUR , 2 meters , Black,LED	M8-F03SLED-5.0PUR/GR	M8-F04SLED-5.0PUR/GR
HighFlexible , 2 meters , Gray,LED	M8-F03SLED-2.0HF/GR	M8-F04SLED-2.0HF/GR
HighFlexible , 2 meters , Black,LED	M8-F03SLED-5.0HF/GR	M8-F04SLED-5.0HF/GR
Anti-Welding,2 meters,Orange,LED	M8-F03SLED-2.0AW/GR	M8-F04SLED-2.0AW/GR

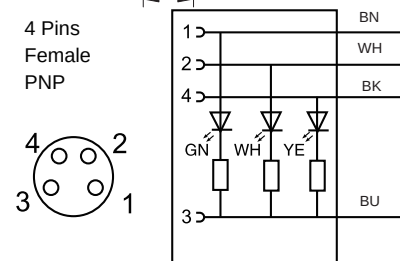




PartNumber		PartNumber
PVC , 2 meters , Gray	M8-F03ALED-2.0PVC/GR	M8-F04ALED-2.0PVC/GR
PVC , 2 meters , Black	M8-F03ALED-2.0PVC/BK	M8-F04ALED-2.0PVC/BK
PUR , 2 meters , Gray	M8-F03ALED-2.0PUR/GR	M8-F04ALED-2.0PUR/GR
PUR , 2 meters , Black	M8-F03ALED-2.0PUR/BK	M8-F04ALED-2.0PUR/BK
HighFlexible , 2 meters , Gray	M8-F03ALED-2.0HF/GY	M8-F04ALED-2.0HF/GY
HighFlexible , 2 meters , Black	M8-F03ALED-2.0HF/BK	M8-F04ALED-2.0HF/BK
Anti-Welding , 2 meters , Gray	M8-F03ALED-2.0AW/OR	M8-F04ALED-2.0AW/OR

Comment : The cable length could be customized;

Technical Parameter:		3Pins	4Pins
Rated voltage		60v	30V
Tighten Way		Metal Nut	Metal Nut
Cable Connection		Premolding	Premolding
Cross-Section		0.25mm(AWG24)	0.25mm(AWG24)
IP-Protection		IP67	IP67

M8 Cordset

Male/Female Doule

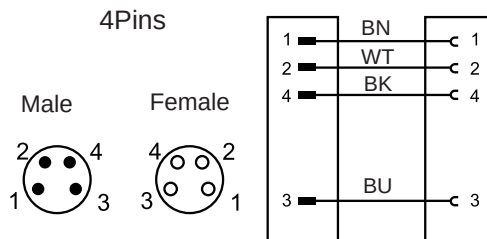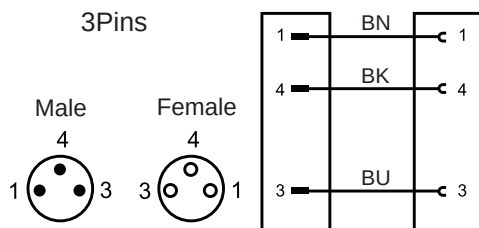

PartNumber

PartNumber




PVC , 2 meters , Gray	M8-M03S/F03S-2.0PVC/GR
PVC , 2 meters , Black	M8-M03S/F03S-2.0PVC/Black
PUR , 2 meters , Gray	M8-M03S/F03S-2.0PUR/GR
PUR , 2 meters , Black	M8-M03S/F03S-2.0PUR/Black
HighFlexible , 2 meters , Gray	M8-M03S/F03S-2.0HF/GR
HighFlexible , 2 meters , Black	M8-M03S/F03S-2.0HF/BK
PVC , 2 meters , Orange	M8-M03S/F03S-2.0AW/OR

M8-M04S/F04S-2.0PVC/GR
M8-M04S/F04S-2.0PVC/GR
M8-M04S/F04S-2.0PVC/GR
M8-M04S/F04S-2.0PVC/GR
M8-M04S/F04S-2.0PVC/GR
M8-M04S/F04S-2.0PVC/GR
M8-M04S/F04S-2.0PVC/GR

DoubleEnd

Male Straight

Female Ange

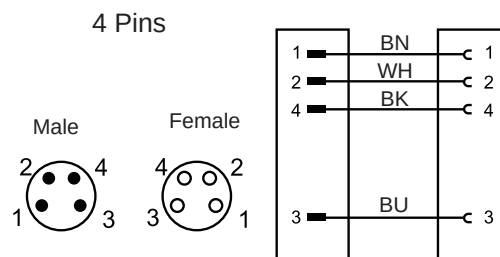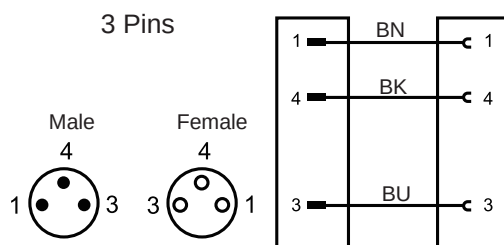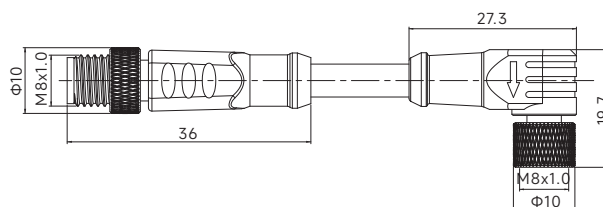

PartNumber

PartNumber

PVC , 2 meters , Gray	M8-M03S/F03A-2.0PVC/GR
PVC , 2 meters , Black	M8-M03S/F03A-2.0PVC/BK
PUR , 2 meters , Gray	M8-M03S/F03A-2.0PUR/GR
PUR , 2 meters , Black	M8-M03S/F03A-2.0PUR/BK
HighFlexible , 2 meters , Gray	M8-M03S/F03A-2.0HF/GR
HighFlexible , 2 meters , Black	M8-M03S/F03A-2.0HF/BK
Anti-Welding , 2 meters , Orange	M8-M03S/F03A-2.0OR/GR


M8-M04S/F04A-2.0PVC/GR
M8-M04S/F04A-2.0PVC/GR
M8-M04S/F04A-2.0PVC/GR
M8-M04S/F04A-2.0PVC/GR
M8-M04S/F04A-2.0PVC/GR
M8-M04S/F04A-2.0PVC/GR
M8-M04S/F04A-2.0PVC/GR

Comment : Length could be customized



Technical Parameter:

	3 Pins	4 Pins
Rated voltage	60v	30V
Tighten Way	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding
Cross-Section	0.25mm(AWG24)	0.25mm(AWG24)
IP-Protection	IP67	IP67

DoubleEnd
Male Straight
Female Straight LED PNP





3Pins PNP



Male

Female




PartNumber

PartNumber



PVC , 2 meters , Gray	M8-M03S/F03SLED-2.0PVC/GR
PVC , 2 meters , Black	M8-M03S/F03SLED-2.0PVC/BK
PUR , 2 meters , Gray	M8-M03S/F03SLED-2.0PUR/GR
PUR , 2 meters , Black	M8-M03S/F03SLED-2.0PUR/BK
HighFlexible , 2 meters , Gray	M8-M03S/F03SLED-2.0HF/GR
HighFlexible , 2 meters , Black	M8-M03S/F03SLED-2.0HF/BK
Anti-Welding , 2 meters , Orange	M8-M03S/F03SLED-2.0AW/OR

M8-M04S/F04SLED-2.0PVC/GR
M8-M04S/F04SLED-2.0PVC/BK
M8-M04S/F04SLED-2.0PUR/GR
M8-M04S/F04SLED-2.0PUR/BK
M8-M04S/F04SLED-2.0HF/GR
M8-M04S/F04SLED-2.0HF/BK
M8-M04S/F04SLED-2.0AW/OR

Comment : Length could be customized


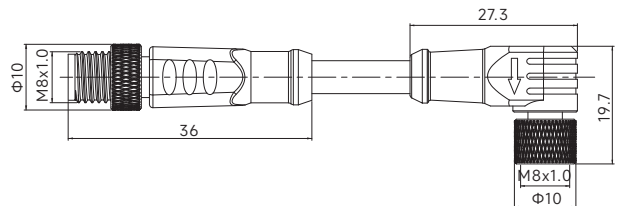


3Pins PNP



Male

Female



PartNumber

PartNumber

PVC , 2 meters , Gray	M8-M03S/F03ALED-2.0PVC/GR
PVC , 2 meters , Black	M8-M03S/F03ALED-2.0PVC/BK
PUR , 2 meters , Gray	M8-M03S/F03ALED-2.0PUR/GR
PUR , 2 meters , Black	M8-M03S/F03ALED-2.0PUR/BK
HighFlexible , 2 meters , Gray	M8-M03S/F03ALED-2.0HF/GR
HighFlexible , 2 meters , Black	M8-M03S/F03ALED-2.0HF/BK
Anti-Welding , 2 meters , Orange	M8-M03S/F03ALED-2.0AW/OR




M8-M04S/F04ALED-2.0PVC/GR
M8-M04S/F04ALED-2.0PVC/BK
M8-M04S/F04ALED-2.0PUR/GR
M8-M04S/F04ALED-2.0PUR/BK
M8-M04S/F04ALED-2.0HF/GR
M8-M04S/F04ALED-2.0HF/BK
M8-M04S/F04ALED-2.0AW/OG

Comment : Length could be customized

Technical Parameter:

	3 Pins	4 Pins
Rated voltage	60v	30V
Tighten Way	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding
Cross-Section	0.25mm(AWG24)	0.25mm(AWG24)
IP-Protection	IP67	IP67




DoubleEnd
M8 Male Straight
M12 Female
Straight

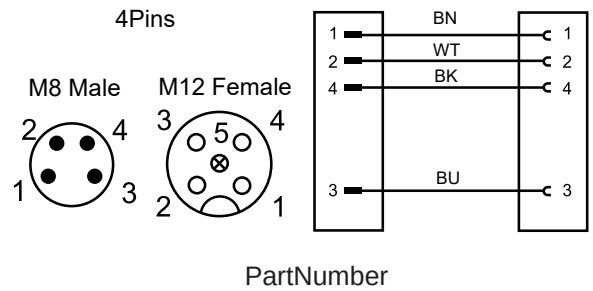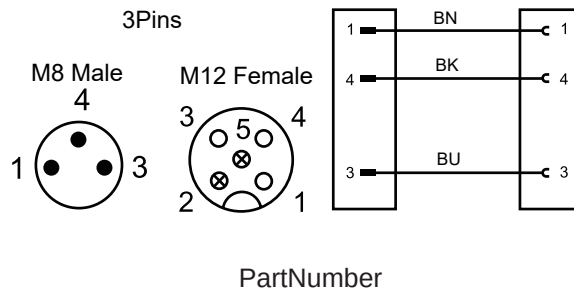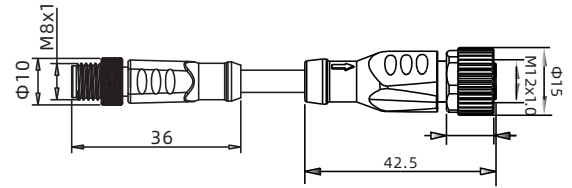

PVC , 2 meters , Gray	M8-M03S/M12-F03S-2.0PVC/GR	M8-M04S/M12-F04S-2.0PVC/GR
PVC , 2 meters , Black	M8-M03S/M12-F03S-2.0PVC/GR	M8-M04S/M12-F04S-2.0PVC/GR
PUR , 2 meters , Gray	M8-M03S/M12-F03S-2.0PUR/GR	M8-M04S/M12-F04S-2.0PUR/GR
PUR , 2 meters , Black	M8-M03S/M12-F03S-2.0PUR/BK	M8-M04S/M12-F04S-2.0PUR/BK
HighFlexible , 2 meters , Gray	M8-M03S/M12-F03S-2.0HF/GR	M8-M04S/M12-F04S-2.0HF/GR
HighFlexible , 2 meters , Black	M8-M03S/M12-F03S-2.0HF/BK	M8-M04S/M12-F04S-2.0HF/BK
Anti-Welding , 2 meters , Orange	M8-M03S/M12-F03S-2.0AW/OR	M8-M04S/M12-F04S-2.0AW/OR

Comment : Length could be customized

DoubleEnd
M8 Male Straight
M12 Female
Angle

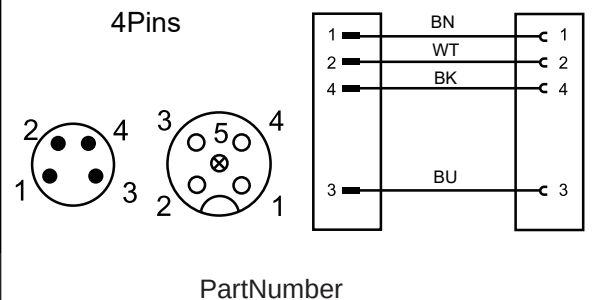
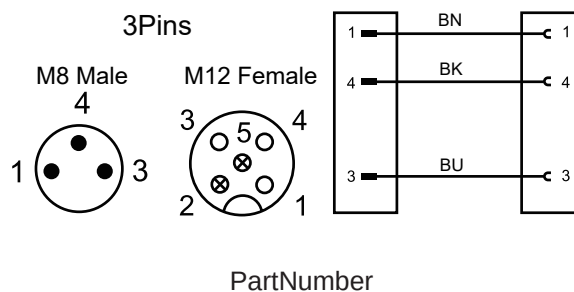
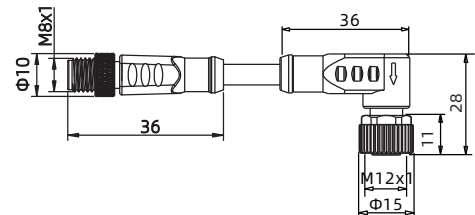


PVC , 2 meters , Gray	M8-M03S/M12-F03A-2.0PVC/GR	M8-M04S/M12-F04A-2.0PVC/GR
PVC , 2 meters , Black	M8-M03S/M12-F03A-2.0PVC/BK	M8-M04S/M12-F04A-2.0PVC/BK
PUR , 2 meters , Gray	M8-M03S/M12-F03A-2.0PUR/GR	M8-M04S/M12-F04A-2.0PUR/GY
PUR , 2 meters , Black	M8-M03S/M12-F03A-2.0PUR/BK	M8-M04S/M12-F04A-2.0PUR/BK
HighFlexible , 2 meters , Gray	M8-M03S/M12-F03A-2.0HF/GR	M8-M04S/M12-F04A-2.0HF/GY
HighFlexible , 2 meters , Black	M8-M03S/M12-F03A-2.0HF/BK	M8-M04S/M12-F04A-2.0HF/BK
Anti-Welding , 2 meters , Orange	M8-M03S/M12-F03A-2.0AW/OR	M8-M04S/M12-F04A-2.0AW/OR

Comment : Length could be customized

Technical Parameter:	3Pins	4Pins
Rated voltage	60v	30V
Tighten Way	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding
Cross-Section	0.25mm(AWG24)	0.25mm(AWG24)
IP-Protection	IP67	IP67




DoubleEnd
M8 Male Straight
M12 Female
Straight Led

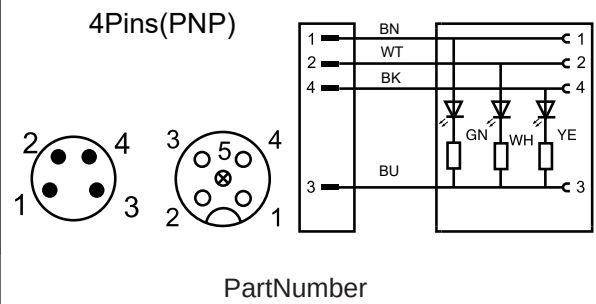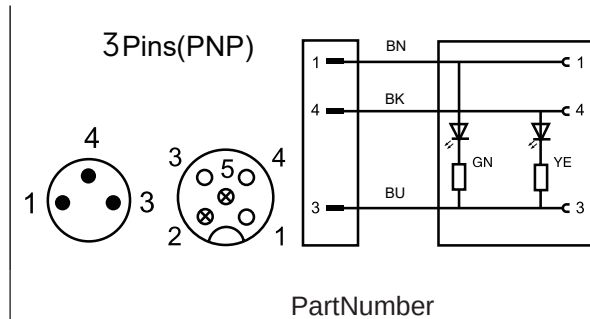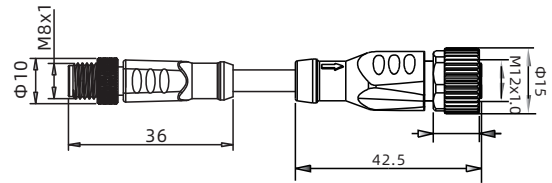

PVC , 2 meters , Gray	M8-M03S/M12-F03SLED-2.0PVC/GR	M8-M04S/M12-F04SLED-2.0PVC/GR
PVC , 2 meters , Black	M8-M03S/M12-F03SLED-2.0PVC/BK	M8-M04S/M12-F04SLED-2.0PVC/BK
PUR , 2 meters , Gray	M8-M03S/M12-F03SLED-2.0PUR/GR	M8-M04S/M12-F04SLED-2.0PUR/GR
PUR , 2 meters , Black	M8-M03S/M12-F03SLED-2.0PUR/BK	M8-M04S/M12-F04SLED-2.0PUR/BK
HighFlexible , 2 meters , Gray	M8-M03S/M12-F03SLED-2.0HF/GR	M8-M04S/M12-F04SLED-2.0HF/GR
HighFlexible , 2 meters , Black	M8-M03S/M12-F03SLED-2.0HF/BK	M8-M04S/M12-F04SLED-2.0HF/BK
Anti-Welding , 2 meters , Orange	M8-M03S/M12-F03SLED-2.0AW/OR	M8-M04S/M12-F04SLED-2.0AW/OR

Comment : Length could be customized

DoubleEnd
M8 Male Straight
M12 Female
Angle Led

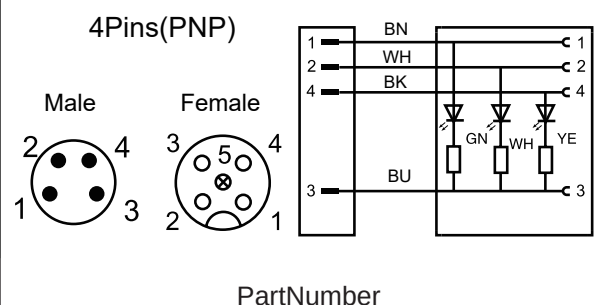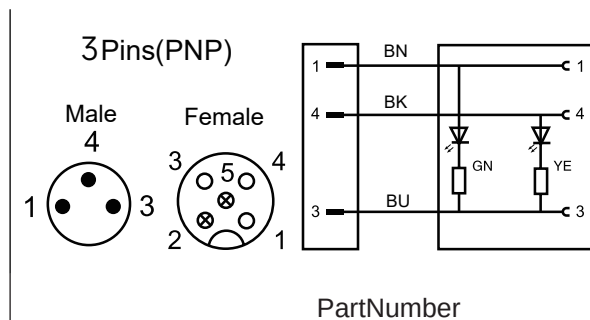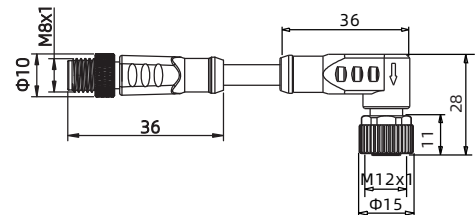



PVC , 2 meters , Gray	M8-M03S/M12-F03ALED-2.0PVC/GR	M8-M04S/M12-F04ALED-2.0PVC/GR
PVC , 2 meters , Black	M8-M03S/M12-F03ALED-2.0PVC/BK	M8-M04S/M12-F04ALED-2.0PVC/BK
PUR , 2 meters , Gray	M8-M03S/M12-F03ALED-2.0PUR/GR	M8-M04S/M12-F04ALED-2.0PUR/GR
PUR , 2 meters , Black	M8-M03S/M12-F03ALED-2.0PUR/BK	M8-M04S/M12-F04ALED-2.0PUR/BK
HighFlexible , 2 meters , Gray	M8-M03S/M12-F03ALED-2.0HF/GR	M8-M04S/M12-F04ALED-2.0HF/GR
HighFlexible , 2 meters , Black	M8-M03S/M12-F03ALED-2.0HF/BK	M8-M04S/M12-F04ALED-2.0HF/BK
Anti-Welding , 2 meters , Orange	M8-M03S/M12-F03ALED-2.0AW/OR	M8-M04S/M12-F04ALED-2.0AW/OR

Comment : Length could be customized

Technical Parameter:


	3Pins	4Pins
Rated voltage	60v	30V
Tighten Way	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding
Cross-Section	0.25mm(AWG24)	0.25mm(AWG24)
IP-Protection	IP67	IP67

Single End ,
M8 Male ,Straight ,Shield ;

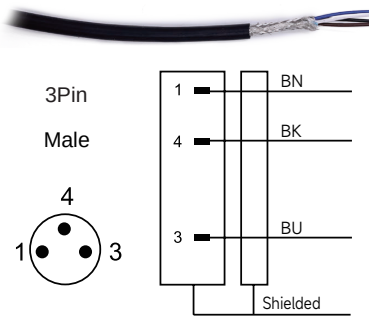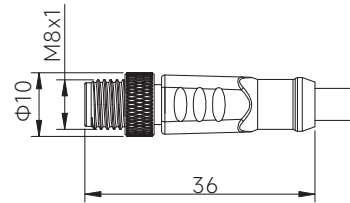

PartNumber

M8-M03S-2.0PUR/BK-SH

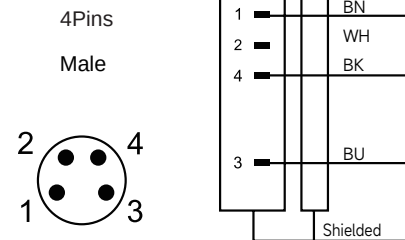

PartNumber

M8-M04S-2.0PUR/BK-SH



Jacket mm2
PUR Bk

Comment : Length could be customized

Single End ,
M8 Male ,Angle,
Shield ;




Rated voltage
Tighten Way
Cable Connection
Cross-Section

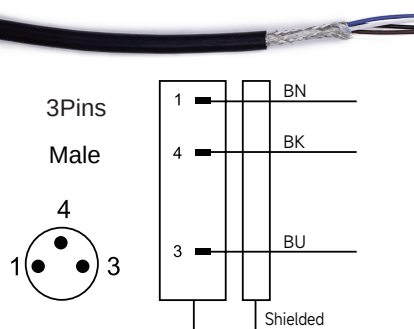

PartNumber

M8-M03A-2.0PUR/BK-SH

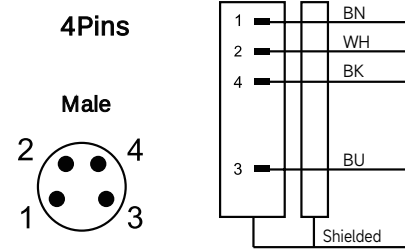

PartNumber

M8-M04A-2.0PUR/BK-SH



Jacket mm2
PUR BK

Comment : Length could be customized

Technical Parameter:

	3Pins	4Pins
Rated voltage	60v	30V
Tighten Way	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding
Cross-Section	0.25mm(AWG24)	0.25mm(AWG24)
IP-Protection	IP67	IP67

Single End ,
M8 Female ,
Straight,Shield ;


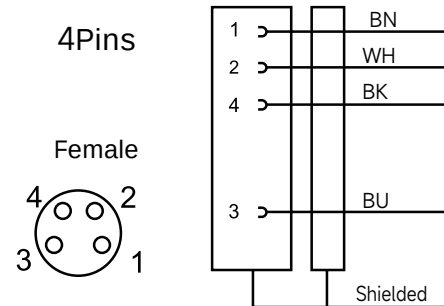
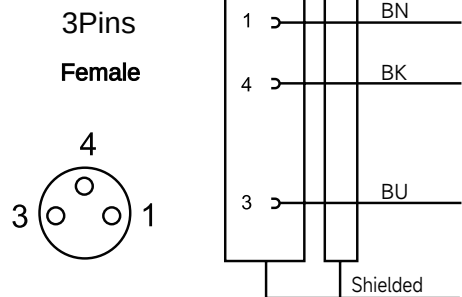


Jacket	mm2	PartNumber	
Shield	BK	M8-F03S-2.0-PUR/BK-SH	M8-F03S-2.0-PUR/BK-SH

Stock

Comment : Length could be customized

Single End ,
M8 Female ,
Angle,Shield

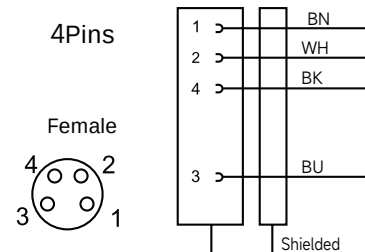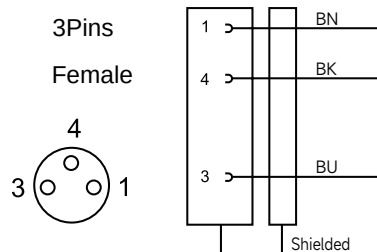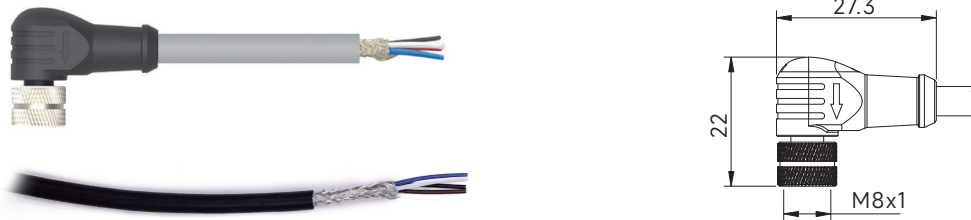




Jacket	mm2	PartNumber	
Shield	BK	M8-F03A-2.0-PUR/BK-SH	M8-F04A-2.0-PUR/BK-SH

Comment : Length could be customized

Technical Parameter:

	3Pins	4Pins
Rated voltage	60V	30V
Tighten Way	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding
Cross-Section	0.25mm(AWG24)	0.25mm(AWG24)
IP-Protection	IP67	IP67

Double End ,
Straight,Shield

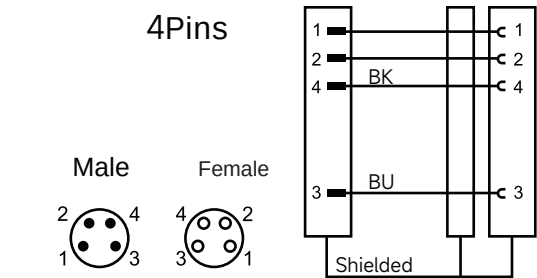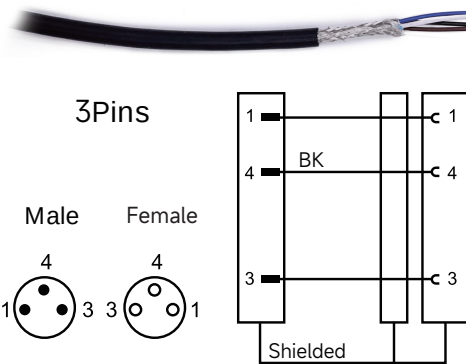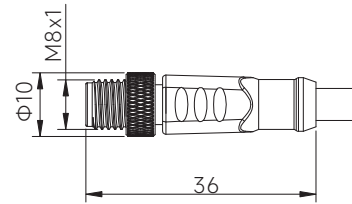

Jacket mm2

PartNumber




PartNumber

Stock PUR Black M8-M03S/F03S-2.0PUR/BK-SH

M8-M04S/F04S-2.0PUR/BK-SH

Comment : Length could be customized

Double End ,
Straight,Shield

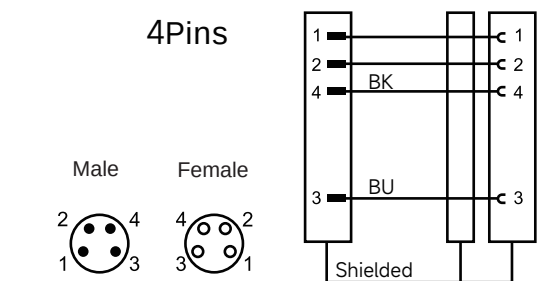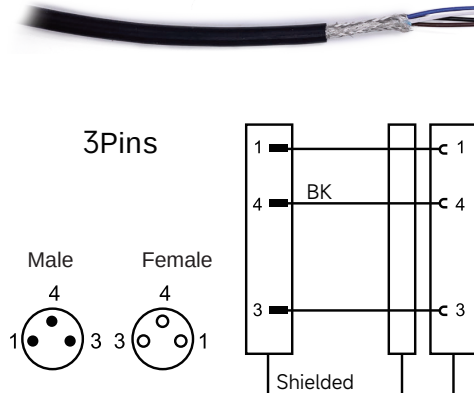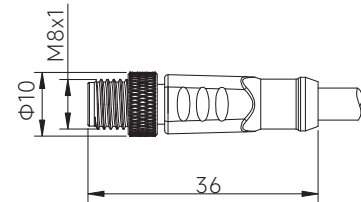

Jacket 0.25mm2

PartNumber

PartNumber

Stock PUR Black M8-M03S/F03A-2.0PUR/BK-SH


M8-M04S/F04A-2.0PUR/BK-SH

Comment : Length could be customized

Technical Parameter:


	3Pins	4Pins
Rated voltage	60v	30V
Tighten Way	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding
Cross-Section	0.25mm(AWG24)	0.25mm(AWG24)
IP-Protection	IP67	IP67

DoubleEnd-Splitter M8Male、Straight2xPigtail

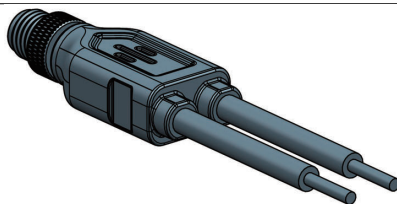

		3Pins		4Pins-3Pins	
Jacket	mm2	PartNumber		PartNumber	
PVC	GY	M8Y-M03-2x2.0PVC/GY		M8Y-M04-2x2.0PVC/BK	Stock
PVC	BK	M8Y-M03-2x2.0PVC/BK		M8Y-M04-2x2.0PVC/BK	
PUR	GY	M8Y-M03-2x2.0PUR/GY		M8Y-M04-2x2.0PUR/GY	
PUR	BK	M8Y-M03-2x2.0PUR/BK		M8Y-M04-2x2.0PUR/BK	Stock
High-Flexible	GY	M8Y-M03-2x2.0HF/GY		M8Y-M04-2x2.0HF/GY	
High-Flexible	BK	M8Y-M03-2x2.0HF/BK		M8Y-M04-2x2.0HF/BK	Stock
Anti-Welding	OR	M8Y-M03-2x2.0AW/OR		M8Y-M04-2x2.0AW/OR	Stock

DoubleEnd-Splitter M8Male、 Straight2xPigtail




		3Pins		4Pins-3Pins	
Jacket	mm2	PartNumber		PartNumber	
PVC	GY	M8Y/2.0-M03-2x2.0PVC/GY		M8Y/2.0-M04/2F03-2x2.0PVC/BK	Stock
PVC	BK	M8Y/2.0-M03-2x2.0PVC/BK		M8Y/2.0-M04-2x2.0PVC/BK	
PUR	GY	M8Y/2.0-M03-2x2.0PUR/G		M8Y/2.0-M04-2x2.0PUR/GY	
PUR	BK	M8Y/2.0-M03-2x2.0PUR/BK		M8Y/2.0-M04-2x2.0PUR/BK	Stock
High-Flexible	GY	M8Y/2.0-M03-2x2.0HF/GY		M8Y/2.0-M04-2x2.0HF/GY	
High-Flexible	BK	M8Y/2.0-M03-2x2.0HF/BK		M8Y/2.0-M04-2x2.0HF/BK	Stock
Anti-Welding	OR	M8Y/2.0-M03-2x2.0AW/OR		M8Y/2.0-M04-2x2.0AW/OR	Stock

Comment : Length could be customized

Technical Parameter:


	3Pins	4Pins
Rated voltage	60v	30V
Tighten Way	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding
Cross-Section	0.25mm(AWG24)	0.25mm(AWG24)
IP-Protection	IP67	IP67

DoubleEnd-Splitter
M8MaleStraight
2Female

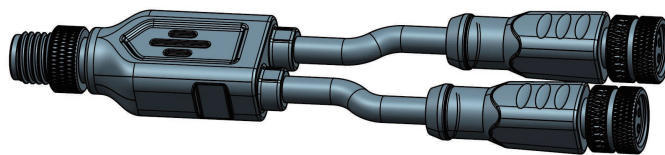

			3Pins		4Pins-3Pins	
Jacket	mm2	PartNumber				
Stock	PVC	GY	M8Y-M03/F03-2x2.0PVC/GY		M8Y-M04/F03-2x2.0PVC/GY	
	PVC	BK	M8Y-M03/F03-2x2.0PVC/BK		M8Y-M04/F03-2x2.0PVC/GY	
	PUR	GY	M8Y-M03/F03-2x2.0PUR/GY		M8Y-M04/F03-2x2.0PUR/GY	
Stock	PUR	BK	M8Y-M03/F03-2x2.0PUR/BK		M8Y-M04/F03-2x2.0PUR/BK	
	High-Flexible	GY	M8Y-M03/F03-2x2.0HF/GY		M8Y-M04/F03-2x2.0HF/GY	
Stock	H-F	BK	M8Y-M03/F03-2x2.0HF/BK		M8Y-M04/F03-2x2.0HF/BK	
Stock	Anti-Welding OR		M8Y-M03/F03-2x2.0AW/OR		M8Y-M04/F03-2x2.0AW/OR	

DoubleEnd-Splitter
M8MaleStraight
2Female

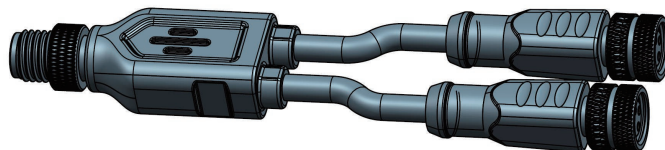


			4Pins	
Jacket	mm2	PartNumber		
Stock	PVC	GY	M8Y-M04/F04-2x2.0PVC/GY	
	PVC	BK	M8Y-M04/F04-2x2.0PVC/BK	
	PUR	GY	M8Y-M04/F04-2x2.0PUR/GY	
Stock	PUR	BK	M8Y-M04/F04-2x2.0PUR/BK	
	High-Flexible	GY	M8Y-M04/F04-2x2.0HF/GY	
Stock	H-F	BK	M8Y-M04/F04-2x2.0HF/BK	
Stock	Anti-Welding OR		M8Y-M04/F04-2x2.0AW/BK	

Comment : Length could be customized

Technical Parameter:

	3Pins	4Pins
Rated voltage	60v	30V
Tighten Way	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding
Cross-Section	0.25mm(AWG24)	0.25mm(AWG24)
IP-Protection	IP67	IP67

DoubleEnd-
Splitter
M8MaleStraight
2Female

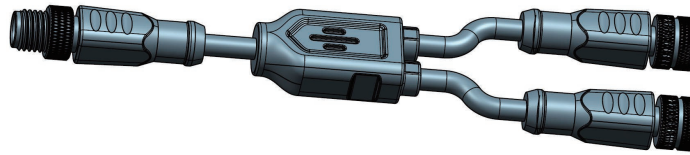

Jacket		3Pins	4Pins-3Pins	
PartNumber				
PVC	GY	M8Y/2.0-M03/F03-2x2.0PVC/GY	M8Y/2.0-M04/F03-2x2.0PVC/GY	Stock
PVC	BK	M8Y/2.0-M03/F03-2x2.0PVC/BK	M8Y/2.0-M04/F03-2x2.0PVC/BK	
PUR	GY	M8Y/2.0-M03/F03-2x2.0PUR/GY	M8Y/2.0-M04/F03-2x2.0PUR/GY	
PUR	BK	M8Y/2.0-M03/F03-2x2.0PUR/BK	M8Y/2.0-M04/F03-2x2.0PUR/BK	Stock
High-Flexible	GY	M8Y/2.0-M03/F03-2x2.0HF/GY	M8Y/2.0-M04/F03-2x2.0HF/GY	
H-F	BK	M8Y/2.0-M03/F03-2x2.0HF/BK	M8Y/2.0-M04/F03-2x2.0HF/BK	Stock
Anti-Welding	OR	M8Y/2.0-M03/F03-2x2.0AW/BK	M8Y/2.0-M04/F03-2x2.0AW/BK	Stock

Comment : Length could be customized

Jacket		4Pins	
PartNumber			
PVC	GY	M8Y/2.0-M04/F04-2x2.0PVC/GY	Stock
PVC	BK	M8Y/2.0-M04/F04-2x2.0PVC/BK	
PUR	GY	M8Y/2.0-M04/F04-2x2.0PUR/GY	
PUR	BK	M8Y/2.0-M04/F04-2x2.0PUR/BK	Stock
High-Flexible	GY	M8Y/2.0-M04/F04-2x2.0HF/GY	
HF	BK	M8Y/2.0-M04/F04-2x2.0HF/BK	Stock
Anti-Welding	OR	M8Y/2.0-M04/F04-2x2.0AW/OR	Stock

Comment : Length could be customized


Technical Parameter:

	3Pins	4Pins
Rated voltage	60v	30V
Tighten Way	Metal Nut	Metal Nut
Cable Connection	Premolding	Premolding
Cross-Section	0.25mm(AWG24)	0.25mm(AWG24)
IP-Protection	IP67	IP67



M8 Flange

M8 Front Mounting

Panel
Mounting

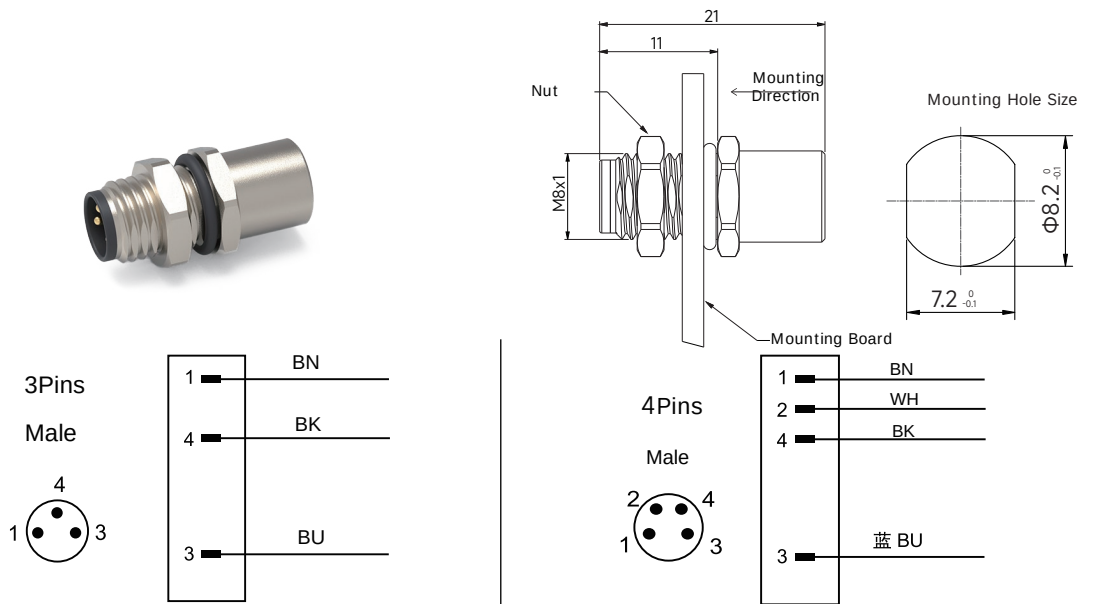

M8 Back Mounting

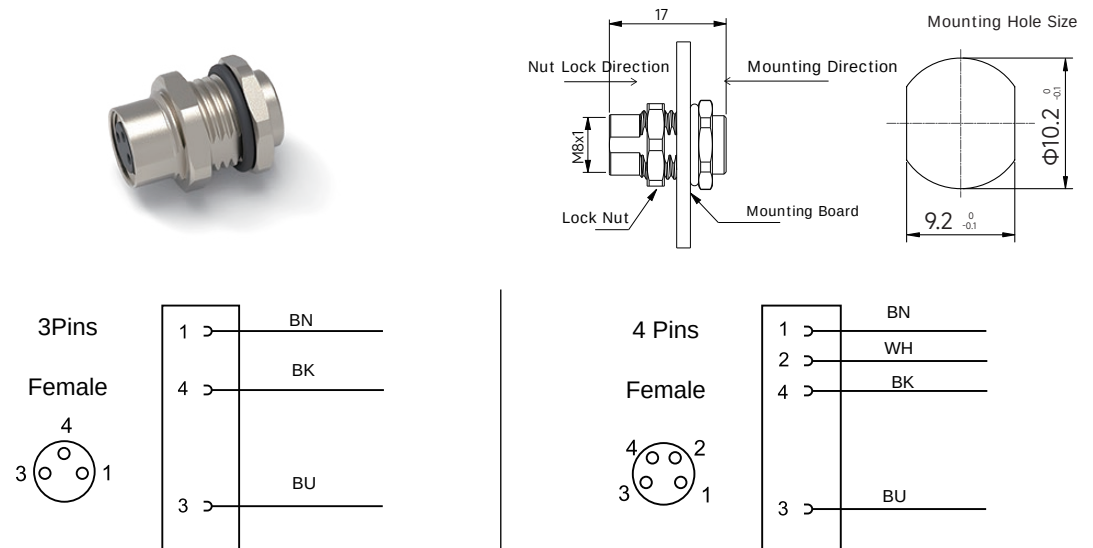

Label Cover
4x18 mm

920001

Label Cover
4x18 mm

920002

Label Board
4x18 mm

920003

M8
wrench

920004

M8 Female
Cover

11801100

M12 Female
Cover






11201100

CableDiameter 4.0...6.5 mm

CableDiameter4.2...7.0 mm


M8 Flange

Back Mounting

Product Picture	Product Size	MountingHole		孔位定义
			FLB-M8-M03(M8)-HB	
			FLB-M8-M04(M8)-HB	
			FLB-M8-F03(M10)-HB	
			FLB-M8-F04(M10)-HB	
			FLB-M8-M03(M8)-0.2 FLB-M8-M03(M8)-0.3 FLB-M8-M03(M8)-0.5 FLB-M8-M03(M8)-1.0 FLB-M8-M03(M8)-2.0	
			FLB-M8-M04(M8)-0.2 FLB-M8-M04(M8)-0.3 FLB-M8-M04(M8)-0.5 FLB-M8-M04(M8)-1.0 FLB-M8-M04(M8)-2.0	
			FLB-M8-F03(M10)-0.2 FLB-M8-F03(M10)-0.3 FLB-M8-F03(M10)-0.5 FLB-M8-F03(M10)-1.0 FLB-M8-F03(M10)-2.0	
			FLB-M8-F04(M10)-0.2 FLB-M8-F04(M10)-0.3 FLB-M8-F04(M10)-0.5 FLB-M8-F04(M10)-1.0 FLB-M8-F04(M10)-2.0	

Rated Voltage	60 V AC/DC				
Rated Current	MAX.4A				
IP Protection IEC 60529Standard	IP67				
Tempreture	-25~+85°C				
Cable Length	0.2m	0.3m	0.5m	1m	2m

Service Network

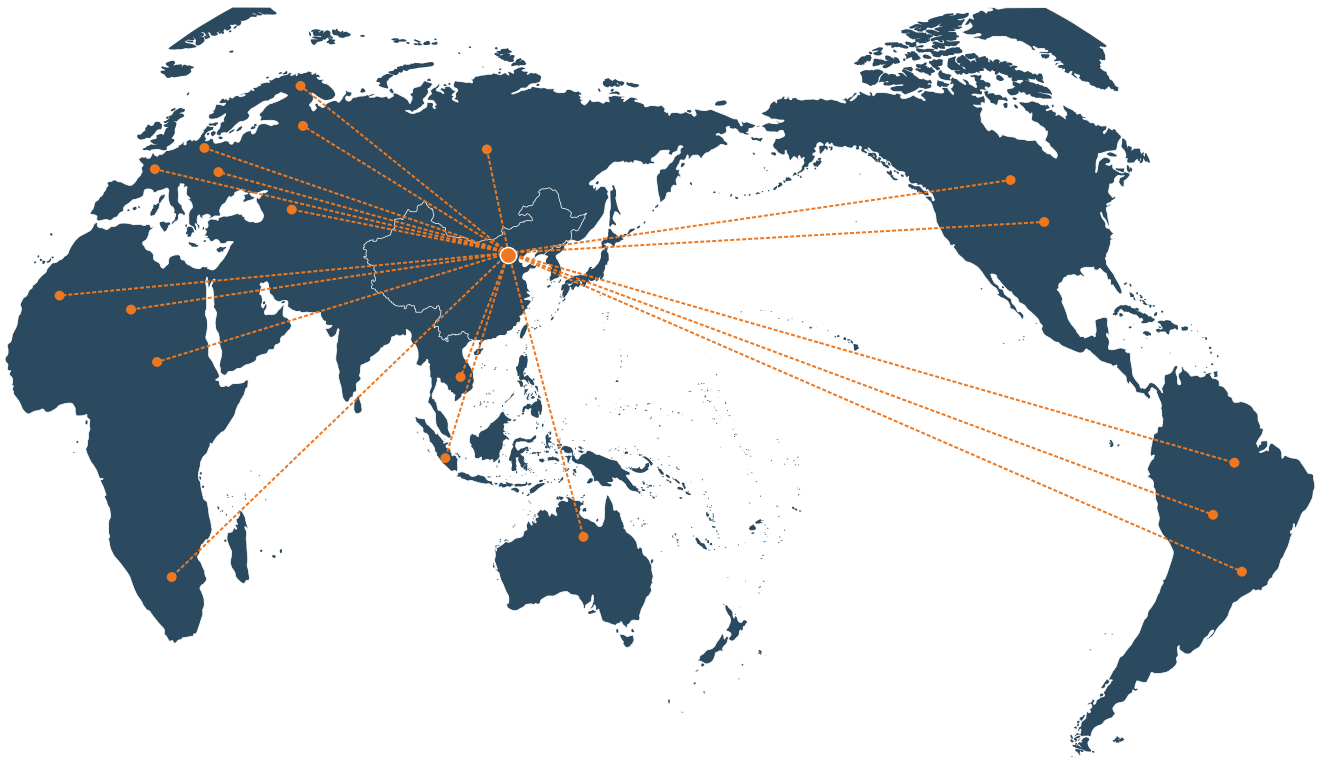

Address : No.655 GaojiRoad, Songjiang District, Shanghai City ,China

Zipcode: 201601

Whats App : +86 13052228269

E-Mail : jana.jiang@fadeya.com

Web : www.fadeya.com

FADEYA

Make Your Automation Project Easier

Hot Line:

+86 13052228269

Website : www.fadeya.com

Mail : jana.jiang@fadeya.com

Address : No.655 GaojiRoad, Songjiang District, Shanghai City ,China